



Workbook. **2023-2024**

first edition may

## GENERAL INFORMATION

Our production started off and continues to be of an artisanal nature. Our lamps are not produced in large series, from moulds or sophisticated plants but they are hand-crafted by our artisans. Slight flaws are thus not to be considered defects, but rather the typical characteristics of manual work.

Catellani & Smith declares under its own responsibility that its products meet the essential requirements of EC directives and comply with EN 60598 for luminaires and related components. Catellani & Smith lamps are built with a voltage of 220/240V.

The pricelist specifies which luminaires are compatible with a voltage of 110V (with standard EC components and not with UL certified components) and which ones can be compatible upon request, by making some styling and technical modifications (price estimate to be provided).

Production is tested 100%: each product undergoes a thorough quality control that guarantees it is intact and fully functional. The guarantee covers the item for 2 years from the date of purchase, including the right to a replacement or to the repair of the product or parts thereof affected by manufacturing defects detected at the time of purchase or that arise over the next two years. **The guarantee does not cover any damage to luminaires caused by connection to incompatible dimmers or control and dimming systems.** Compatibility of our products with dimmers or home automation systems must be checked prior to purchase and it is the responsibility of the customer or person acting for him/her.

The guarantee does not include any refunds for the intervention of qualified staff (electrician, etc.) or costs for the installation/disassembly or costs related to equipment (such as scaffolding access platforms, scaffolding, etc.) required to access the luminaires and perform maintenance and control operations on them.

It is advisable always to test the luminaires on the ground before final installation if they are to be fitted under special circumstances or connected to control and dimming systems.

In compliance with the regulations in force, **the manufacturer reserves the right to make any styling or technical changes without prior notice.**

**Such changes also include the type and wattage of light bulbs and electronic parts.** These changes are due to market availability issues since it is continuously growing and evolving, and it tends to eliminate certain products in favour of others, discontinuing their production without notice (which is increasingly often the case with LED bulbs).

According to regulation 2017/1369, starting from 01/03/2022 the new energy efficiency classification comes into force, which also concerns light sources.

The rating scale goes from A (maximum efficiency) to G (minimum efficiency), replacing the previous scale from A +++ to D, as required by Directive 2010/30 / EU currently in force.

Based on warehouse supplies, we will update the indication of the energy class in our documentation.

The Catellani & Smith Workbook is designed to help and protect the customer in his/her choice of products. We therefore recommend that you read each section thoroughly, given the complexity of the electronic parts, and that you check the compatibility between the various components (such as dimmers, light sources, etc.) and contact qualified staff for the choice and installation of products.



Latest Creations

p. 6



Enso

Colore

p. 6



Ettorino T

Ettorino Clamp

Ettorino F

Ettorino BIG

Ale BE T



Ale C



Ale BIG



Ale W

SimilDesign

p. 12



Sfera W



Cono W



Atman

Les Petites

p. 14



28 Petits Bijoux



56 Petits Bijoux



22 Petites Lentilles

Lederam

p. 16



Lederam Manta S1



Lederam Manta S2




Lederam C150/180



Lederam Manta CWS1



Lederam C2



Lederam W



Lederam W1



Lederam W2



Lederam WF



Lederam T1



Lederam F0



Lederam F1



Lederam F2



Lederam F3

Sorry Giotto

p. 26



Sorry Giotto 9



Sorry Giotto 12



Sorry Giotto 1



Sorry Giotto 3

Light Stick

p. 28



Light Stick CW



Light Stick V



Light Stick T



Light Stick F

Wa Wa

p. 30



Wa Wa T



Wa Wa F



Uau T



Uau F

Giulietta

p. 32



Giulietta BE T



Giulietta BE F



Giulietta W



Giulietta T



Giulietta F

Jackie O

p. 36




Jackie O JC



Jackie O IC



Jackie O Chand. 6/9/12



Jackie O Chand. 15/20/24

PostKrisi

p. 38



PostKrisi 50-51-52



PostKrisi 10 Malagolina



PostKrisi F 100




PostKrisi W 21-40



PostKrisi CW 70




PostKrisi 49

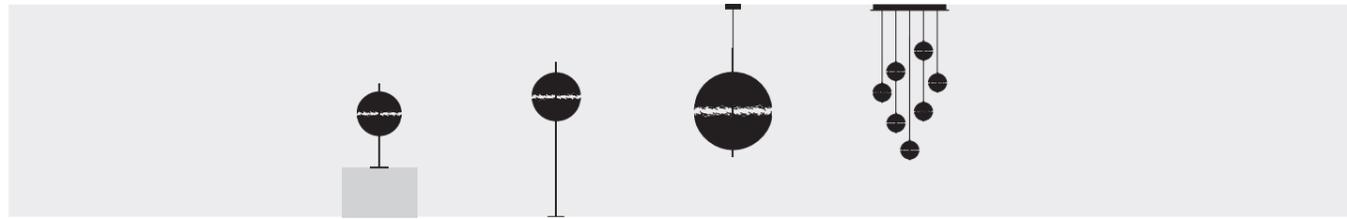

PostKrisi T 61    PostKrisi F 64    PostKrisi 65-66-67    PostKrisi Chandelier

Fil de Fer


p. 46

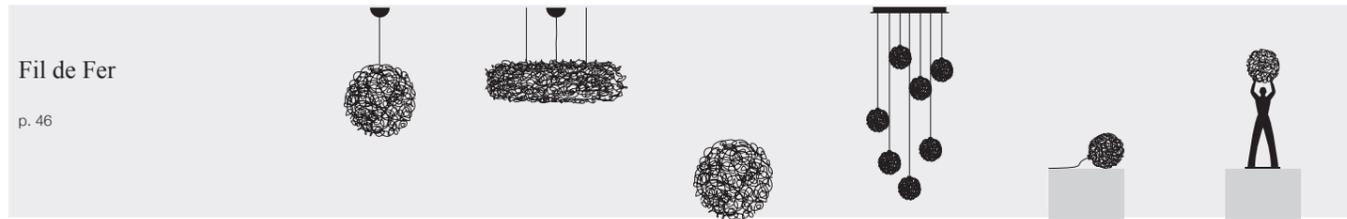

Fil de Fer    Fil de Fer Nuvola    Fil de Fer F    Sweet Light Chandelier    Sweet Light T    Uomo della Luce S

Lucenera

p. 50

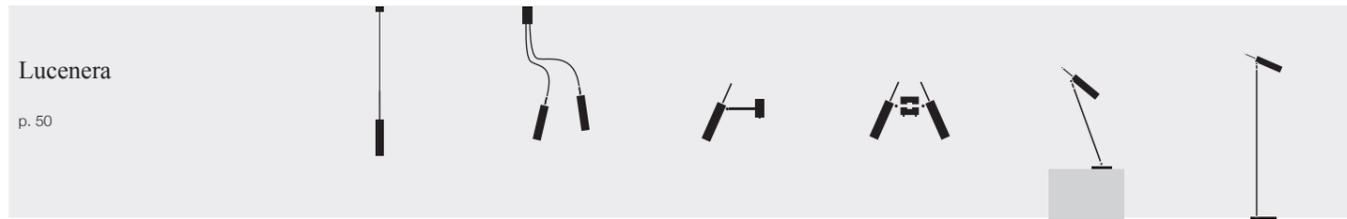

Lucenera 504    Lucenera 206    Lucenera 502    Lucenera 503    Lucenera 500    Lucenera 506

Stchu-Moon

p. 52




Stchu-Moon 02    Stchu-Moon 02 230V    Stchu-Moon 02 Chand.    Stchu-Moon 05    Stchu-Moon 08    Stchu-Moon R




Stchu-Moon 01    Stchu-Moon 09

Macchina della Luce


p. 58

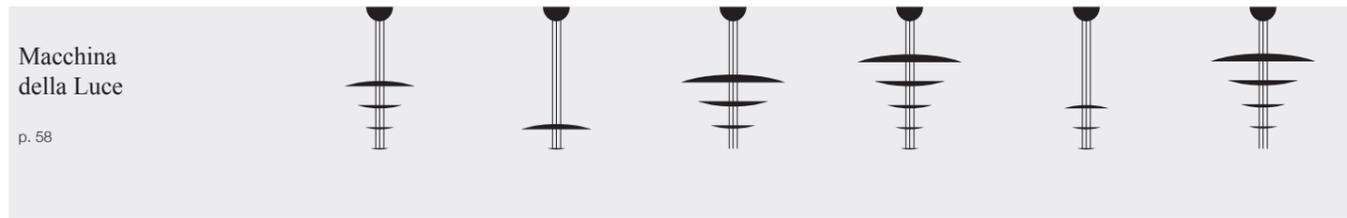

mod. A    mod. B    mod. C    mod. D    mod. E    mod. F




mod. I

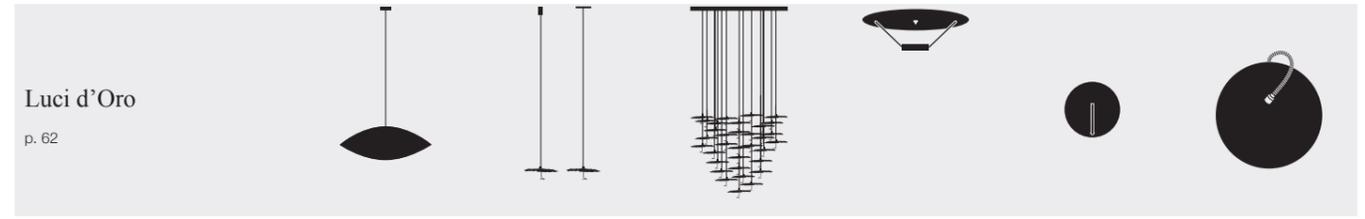


Luci d'Oro  
p. 62

Malagola 27/55/110    Gold Moon JC/IC    Gold Moon Chandelier    DiscO    Luna W    Luna Piena

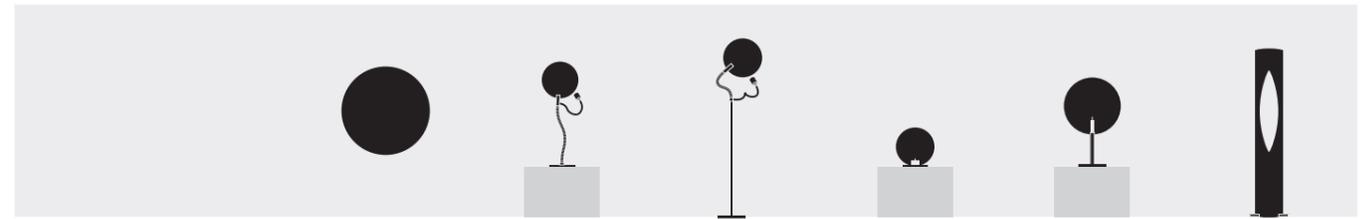


Francesca    Luce d'Oro T    Luce d'Oro F    Luna    Gemma    Colonna

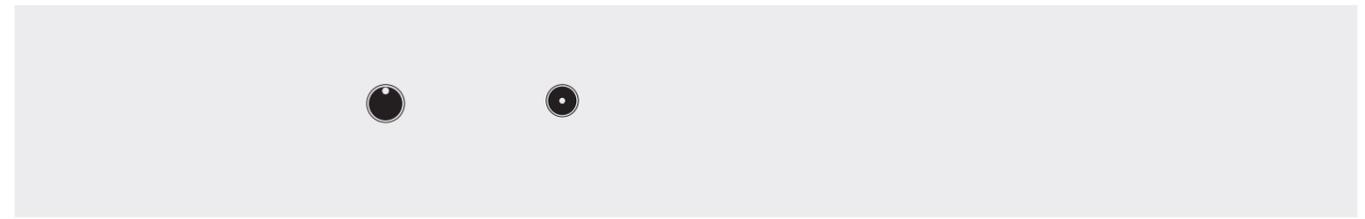


Pepita 102    Pepita 65

Turciù

p. 70

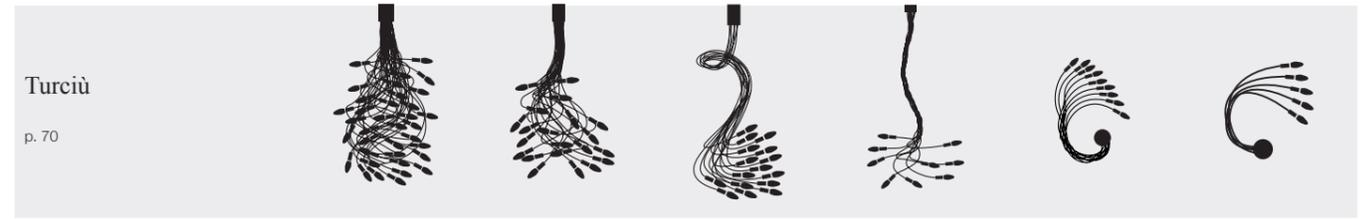


Turciù 36    Turciù 21    Turciù 16    Turciù 9    Turciù 9    Turciù 5

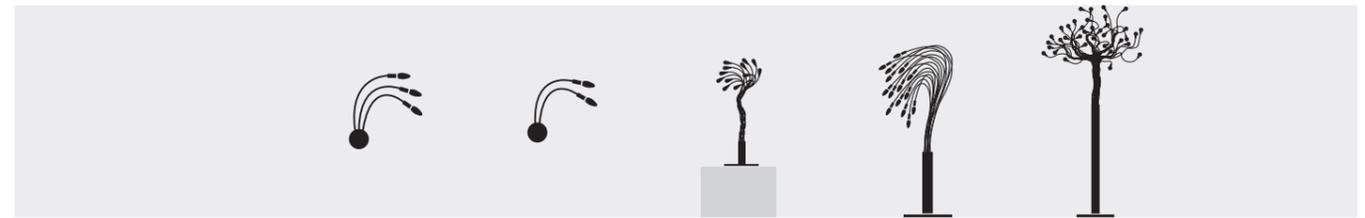


Turciù 3    Turciù 2    Bonsai    Sottovento    Albero della Luce

Oggetti Senza Tempo

p. 76

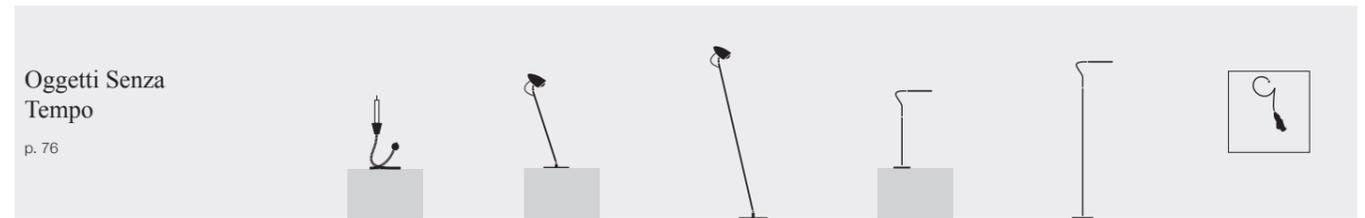

Miracolo    Ciclotalia T    Ciclotalia F    Lola T    Lola F    Luce che dipinge

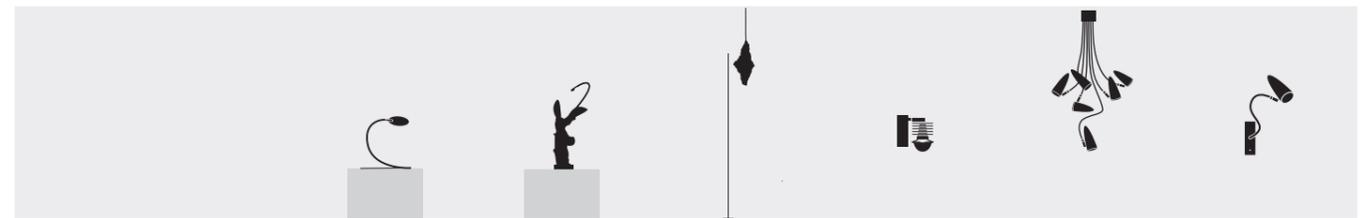

Herem T    Nike    Shadow    EC 301    Ciclotalia Flex C6    Ciclotalia Flex W1



Ciclotalia Flex W2



Ciclotalia Flex F3



U. W



U. F Up



U. W Flex



U. F Flex



Vi. W



Vi. F

### Other Smiths

p. 86



Talismano (Other Smiths)



Alchemie T

### Medousê (outdoor)

p. 88



Medousê W



Medousê F

### More (outdoor)


p. 90



More



More 0



More F

### Sypha

p. 92



Syphasera



Syphasera



Syphaduepassi

### Fil de Fer

p. 94



Fil de Fer



Fil de Fer F



Uomo della Luce XXL



### Limited Edition

p. 96



Trenta

### Technical information

p. 100

Mains voltage LED

p. 100

Lederam: colour combinations and details

p. 102

Chandelier

p. 104

Macchina della Luce LED boards

p. 106

Stchu-Moon LED boards

p. 107

Outdoor: Gel box system

p. 108

Outdoor: Quick connectors system

p. 109

Outdoor accessories

p. 110

Medousê installation suggestions

p. 111

Installation suggestions for Sypha/More

p. 112

PSU (Power Supply Unit) Kits for Jackie O and Gold Moon

p. 114

Drivers @24V DC

p. 115

Instructions for the connection of multiple Pepita and Ametista

p. 116

Dimming wiring diagrams

p. 117



## Latest creations

[ *Finishes* ] // **Brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity. / **Hand painting** is chosen for its deliberate textured effect and uniqueness of result. Any irregularities or unevenness in the coating cannot be considered defect, but rather a hallmark of the artisanal crafting process.

[ *Note* ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / ( \* ) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard.

p. 17



### Enso / table lamp


	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
ENSO / blue / brass base / black dimmer and wire	110-240V	constant current LED	LED board	11x1W 11W	1749	2700	>90	F	plug driver*	included (memory last step)

## Colore

[ *Finishes* ] // **Brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity.

[ *Note* ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / ( \* ) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard.


p. 23

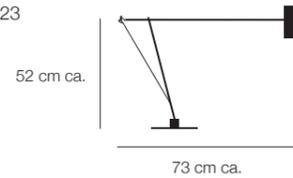

### Ettore T / table lamp

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
ETRT / colourful (white/red/yellow/blue) / red man silhouette / nickel dimmer / blue wire	110-240V	constant current LED 300 mA	COB LED	10W	1441	2700	80	E	plug driver*	
ETRTB / black / red man silhouette / nickel dimmer / black wire										
ETRTW / white / red man silhouette / nickel dimmer / blue wire										

p. 27

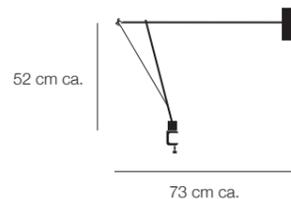


**Ettorino Clamp** / table lamp with clamp

- ETRC / colourful (white/red/yellow/blue) / red man silhouette / nickel dimmer / blue wire
- ETRCB / black / red man silhouette / nickel dimmer / black wire
- ETRCW / white / red man silhouette / nickel dimmer / blue wire

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110-240V	constant current LED 300 mA	COB LED	10W	1441	2700	80	E	plug driver*	included (memory last step)

p. 31

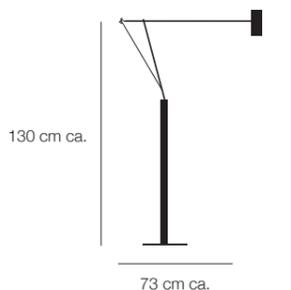


**Ettorino F** / standing lamp

- ETRF / colourful (white/red/yellow/blue) / red man silhouette / blue wire
- ETRFB / black / red man silhouette / black wire
- ETRFW / white / red man silhouette / blue wire

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110-240V	constant current LED 300 mA	COB LED	10W	1441	2700	80	E	plug driver*	push dimmer

p. 35

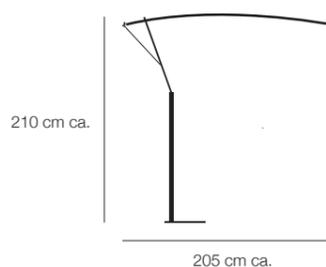

**Ettorino BIG** / standing lamp

- ETRBIG / colourful (white/red/yellow/blue) / red man silhouette / black wire
- ETRBIGB / black / red man silhouette / black wire
- ETRBIGW / white / red man silhouette / black wire

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110-240V	constant current LED	COB LED	15W	2187	2700	80	D	plug driver*	push dimmer (downwards)
		interch. LED	1W	140	2700	85	D		on/off (upwards)

p. 41



**Ale BE T** / battery table lamp

- ALEBT / colourful (white/red/yellow/blue) / black fly
- ALEBTFL / fluo (orange/blue/yellow/magenta) / black fly
- ALEBTB / black / white fly
- ALEBTW / white / black fly

battery	source	type	watt	lumen	K	CRI	en. class	battery charger	dimmer
Li-ION 3,7V 4100 mAh	constant voltage LED	LED board	1,5W	219	2700	>80	D	input 110/240V output 5V@1,2 A (EU plug only)	on/off switch

**Ale C** / ceiling lamp

ALEC / colourful (white/red/yellow/blue)

ALECFL / fluo (orange/blue/yellow/magenta)

ALECB / black

ALECW / white

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
240V (110V available on request)	constant current LED 270 mA	COB LED	9W	1296	2700	80	E	constant current driver	IGBT/Triac dimable

**Ale BIG** / table lamp


ALEBIG / colourful (white/red/yellow/blue) / black fly and wire

ALEBIGFL / fluo (orange/yellow/magenta) / black fly and wire

ALEBIGB / black / white fly / black wire

ALEBIGW / white / black fly and wire

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110-240V	constant current LED	COB LED	15W	2187	2700	80	D	plug driver*	push dimmer

**Ale W** / wall lamp

ALEW / colourful (white base / blue shade) / black fly

ALEWFL / fluo (white base / magenta shade) / black fly

ALEWB / black (white base / black shade) / white fly

ALEWW / white (white base and shade) / black fly

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
240V (110V available on request)	constant current LED 500 mA	LED board	13W	2019	2700	>80	F	constant current driver	IGBT/Triac dimable



# SimilDesign

[ Finishes ] // **Hand painting** is chosen for its deliberate textured effect and uniqueness of result. Any irregularities or unevenness in the coating cannot be considered defect, but rather a hallmark of the artisanal crafting process. / **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request.

[ Note ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (\*) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard.

p. 61




Sfera W / wall lamp

SFWNC / nickel mirrored

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
240V (110V available on request)	constant current LED 450 mA	COB LED	15W	2187	2700	80	D	constant current driver	IGBT/Triac dimmable

p. 65

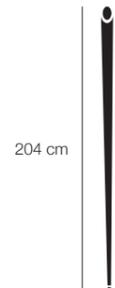


Cono W / wall lamp with floor connection

CNW / blue/internal irregular with gold coloured leaf / black wire

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110-240V	constant current LED 450mA	COB LED	15W	2187	2700	80	D	plug driver*	push dimmer
	LED bulb	G4 bulb	max 1W	67	2700	80	F		on/off switch

p. 66



Atman / table lamp

AT / oval crystal glass / nickel base / blue wire / black dimmer

ATPL / oval crystal glass / nickel base / blue wire / black dimmer

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
220-240V (EU plug only)	constant current LED 350 mA	interch. LED	1x1W	140	2700	85	D	constant current plug driver (EU plug only)	included (memory 100%)
110-240V (all other plugs)	constant current LED 350 mA	interch. LED	1x1W	140	2700	85	D	constant current plug driver (all other plugs)*	included (memory last step)




# Les Petites

[ Finishes ] // **Satin brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity.

[ Note ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / ( \* ) The remote control provided allows to switch on and dim independently the LED strip on the base and the LEDs on the oval. The system (we use Casambi) can be programmed and controlled also via app. / ( \*\* ) Our LEDs can be dimmed by using compatible dimmers tested specifically to dim very low loads. We suggest checking the minimum load of the dimmer before installation.

p. 74

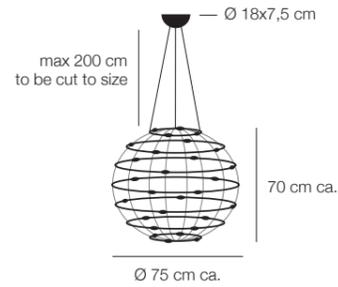

## 28 Petits Bijoux / pendant lamp


PB28 / untreated brass rings / white base / transparent covers with brass clips

\*110V version available with white base Ø 21x10,5 cm

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V* or 240V	constant voltage 24V LED	interch. LED board	28x1W 28W	4004	2700	>80	G	constant voltage driver	YES IGBT/Triac**

weight 6 kg

p. 77

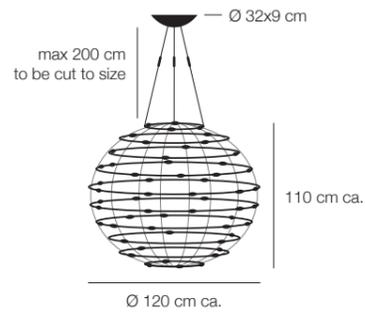


## 56 Petits Bijoux / pendant lamp

PB56 / untreated brass rings / white base / transparent covers with brass clips

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V or 240V	constant voltage 24V LED	interch. LED board	56x1W 56W	8008	2700	>80	G	constant voltage driver	YES IGBT/Triac**

weight 13 kg

p. 83

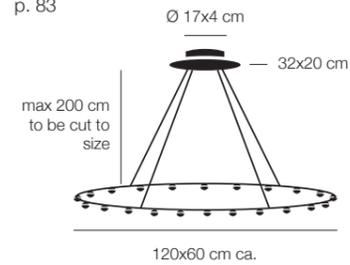

## 22 Petites Lentilles / pendant lamp

PL22 / untreated brass oval / white base / transparent lens with brass holder


voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V or 240V	constant voltage 24V LED	interch. LED board	22x1W 22W	3146	2700	>80	G	constant voltage driver	wireless independent (remote control incl.)*
		low voltage LED strip (directed upwards)	4W	150					

weight 3,6 kg

# Lederam

[ Note ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / ( \* ) Mains voltage LED modules and COB LED are dimmable using IGBT (trailing edge) dimmers designed specifically for LED sources. Their dimming is extremely delicate: incompatible dimmers may cause irreparable damage to the LED. Some dimmers on the market have a NO button (Normally Open) or are specific connector socket-mounted or recessed. They are generally inserted into junction boxes; their limited thickness facilitates the installer's task and makes the dimmer fit for installation even in shallow boxes. Dimmers with an integrated radio dimmer for both manual (NO button) and wireless control are also available. It is important to note that during adjustment the dimming appears less precise, with some flickering. Furthermore some types of dimmer, even if they have been recommended by the manufacturers themselves, have visible flickering (almost essentially down to a minimum) depending on the mains and on the type of interference present. The problem can be solved by increasing the minimum value setting of the potentiometer on the dimmer. Low voltage DALI or 1...10V versions available on request. / ( \*\* ) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard.

p. 88

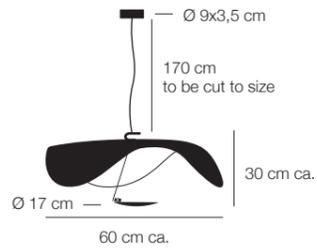


## Lederam Manta S1 / pendant lamp

- LS13 / shade black/gold / black rod / gold disc / black base
- LS14 / shade black/copper / black rod / copper disc / black base
- LS15 / shade white/white / gold rod / white disc / white base
- LS16 / shade white/gold / satin rod / white disc / white base
- LS18 / shade white/white / satin rod / white disc / white base
- LS110 / shade white/white / white rod / white disc / white base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
240V	mains voltage LED	LED module	1x17W	1550	2700	>80	F		YES*
(110V)	(mains voltage LED)	(LED module)	(1x14W)	(1540)	(2700)	(80)	(A+)		(YES*)

weight 2 kg

p. 89

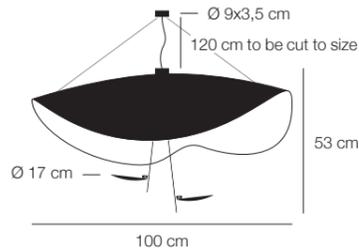


## Lederam Manta S2 / pendant lamp

- LS23 / shade black/gold / black rods / gold discs / black bases
- LS24 / shade black/copper / black rods / copper discs / black bases
- LS25 / shade white/white / gold rods / white discs / white bases
- LS26 / shade white/gold / satin rods / white discs / white bases
- LS28 / shade white/white / satin rods / white discs / white bases

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
240V	mains voltage LED	LED module	2x17W 34W	3100	2700	>80	F		YES*
(110V)	(mains voltage LED)	(LED module)	(2x14W 28W)	(3080)	(2700)	(80)	(A+)		(YES*)

weight 5,5 kg

p. 93

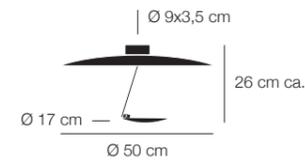


## Lederam C150 / ceiling lamp

- LC1503 / shade black/gold / black rod / gold disc / black base
- LC1504 / shade black/copper / black rod / copper disc / black base
- LC1505 / shade white/white / gold rod / white disc / white base
- LC1506 / shade white/gold / satin rod / white disc / white base
- LC1508 / shade white/white / satin rod / white disc / white base
- LC15010 / shade white/white / white rod / white disc / white base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
240V	mains voltage LED	LED module	1x17W	1550	2700	>80	F		YES*
(110V)	(mains voltage LED)	(LED module)	(1x14W)	(1540)	(2700)	(80)	(A+)		(YES*)

p. 93

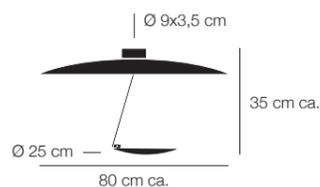**Lederam C180** / ceiling lamp

LC1803 / shade black/gold / black rod / gold disc / black base

LC1804 / shade black/copper / black rod / copper disc / black base

LC1805 / shade white/white / gold rod / white disc / white base


LC1806 / shade white/gold / satin rod / white disc / white base

LC1808 / shade white/white / satin rod / white disc / white base

LC18010 / shade white/white / white rod / white disc / white base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
240V	mains voltage LED	LED module	1x25W	2875	2700	90	E	-	YES*
(110V)	(mains voltage LED)	(COB LED)	(1x30W)	(2190)	(2700)	(90)	(A+)	-	(YES*)

p. 96

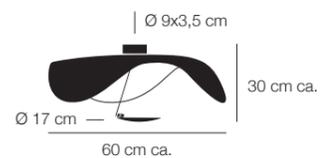**Lederam Manta CWS1** / ceiling or wall lamp

LCWS13 / shade black/gold / black rod / gold disc / black base

LCWS14 / shade black/copper / black rod / copper disc / black base

LCWS15 / shade white/white / gold rod / white disc / white base


LCWS16 / shade white/gold / satin rod / white disc / white base

LCWS18 / shade white/white / satin rod / white disc / white base

LCWS110 / shade white/white / white rod / white disc / white base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
240V	mains voltage LED	LED module	1x17W	1550	2700	>80	F	-	YES*
(110V)	(mains voltage LED)	(LED module)	(1x14W)	(1540)	(2700)	(80)	(A+)	-	(YES*)

p. 97

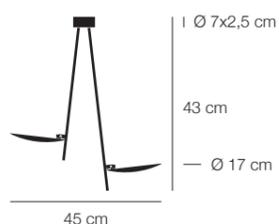**Lederam C2** / ceiling lamp

LC22 / black discs / satin rods / black base

LC23 / gold discs / black rods / black base


LC24 / copper discs / black rods / black base

LC25 / white discs / gold rods / white base

LC26 / white discs / satin rods / white base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
240V	mains voltage LED	LED module	2x17W 34W	3100	2700	>80	F	-	YES*
(110V)	(mains voltage LED)	(LED module)	(2x14W 28W)	(3080)	(2700)	(80)	(A+)	-	(YES*)

p. 99

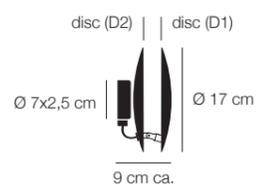**Lederam W 17** / wall lamp

LW171 / disc D1 black/copper - disc D2 copper/black / black base

LW172 / disc D1 black/gold - disc D2 gold/black / black base

LW173 / disc D1 gold/gold - disc D2 gold/white / white base


LW174 / disc D1 copper/copper - disc D2 copper/white / white base

LW175 / disc D1 white/gold - disc D2 gold/white / white base

LW176 / disc D1 white/copper - disc D2 copper/white / white base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
240V	mains voltage LED	LED module	1x17W	1550	2700	>80	F	-	YES*
(110V)	(mains voltage LED)	(LED module)	(1x14W)	(1540)	(2700)	(80)	(A+)	-	(YES*)


p. 99

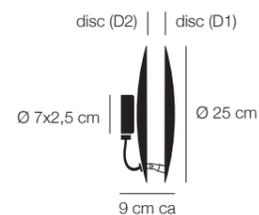**Lederam W 25 / wall lamp**

LW251 / disc D1 black/copper - disc D2 copper/black / black base  
 LW252 / disc D1 black/gold - disc D2 gold/black / black base  
 LW253 / disc D1 gold/gold - disc D2 gold/white / white base  
 LW254 / disc D1 copper/copper - disc D2 copper/white / white base  
 LW255 / disc D1 white/gold - disc D2 gold/white / white base  
 LW256 / disc D1 white/copper - disc D2 copper/white / white base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
240V	mains voltage LED	LED module	1x17W	1550	2700	>80	F	-	YES*
(110V)	(mains voltage LED)	(LED module)	(1x14W)	(1540)	(2700)	(80)	(A+)	-	(YES*)


p. 132

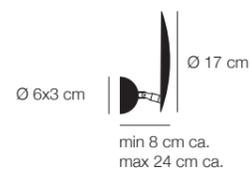**Lederam W1 17 / wall lamp**

LW1171 / black disc / black base  
 LW1173 / gold/black disc / black base  
 LW1174 / copper/black disc / black base  
 LW1176 / white disc / white base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
240V	mains voltage LED	LED module	1x17W	1550	2700	>80	F	-	YES*
(110V)	(mains voltage LED)	(LED module)	(1x14W)	(1540)	(2700)	(80)	(A+)	-	(YES*)


p. 100

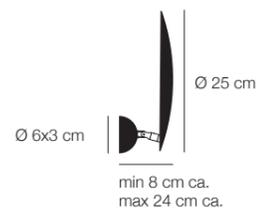**Lederam W1 25 / wall lamp**

LW1251 / disc Ø 25 cm black / black base  
 LW1253 / disc Ø 25 cm gold/black / black base  
 LW1254 / disc Ø 25 cm copper/black / black base  
 LW1256 / disc Ø 25 cm white / white base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
240V	mains voltage LED	LED module	1x17W	1550	2700	>80	F	-	YES*
(110V)	(mains voltage LED)	(LED module)	(1x14W)	(1540)	(2700)	(80)	(A+)	-	(YES*)


p. 101

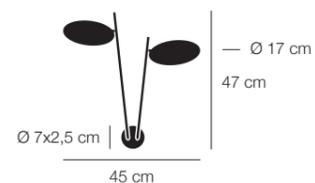**Lederam W2 / wall lamp**

LW22 / black discs / satin rods / black base  
 LW23 / gold discs / black rods / black base  
 LW24 / copper discs / black rods / black base  
 LW25 / white discs / gold rods / white base  
 LW26 / white discs / satin rods / white base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
240V	mains voltage LED	LED module	2x17W 34W	3100	2700	>80	F	-	YES*
(110V)	(mains voltage LED)	(LED module)	(2x14W 28W)	(3080)	(2700)	(80)	(A+)	-	(YES*)

p. 102




**Lederam WF 17 / wall lamp**

- LWF171 / black disc / black base
- LWF173 / gold/white disc / white base
- LWF174 / copper/white disc / white base
- LWF176 / white disc / white base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
240V	mains voltage LED	LED module	1x17W	1550	2700	>80	F		YES*
(110V)	(mains voltage LED)	(LED module)	(1x14W)	(1540)	(2700)	(80)	(A+)		(YES*)

p. 102




**Lederam WF 25 / wall lamp**

- LWF251 / black disc / black base
- LWF253 / gold/white disc / white base
- LWF254 / copper/white disc / white base
- LWF256 / white disc / white base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
240V	mains voltage LED	LED module	1x25W	2875	2700	90	E		YES*
(110V)	(mains voltage LED)	(LED module)	(1x28W)	(2580)	(2700)	(80)	(A+)		(YES*)

p. 103




**Lederam T1 / table lamp**

- LT12LVO / black disc / satin rod / black base/cable/dimmer
- LT13LVO / gold disc / black rod / black base/cable/dimmer
- LT14LVO / copper disc / black rod / black base/cable/dimmer
- LT15LVO / white disc / gold rod / white base / black dimmer / blue cable
- LT16LVO / white disc / satin rod / white base / black dimmer / blue cable

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110-240V	constant current LED	COB LED	1x10W	1441	2700	80	E	plug driver**	included (memory last step)

p. 104

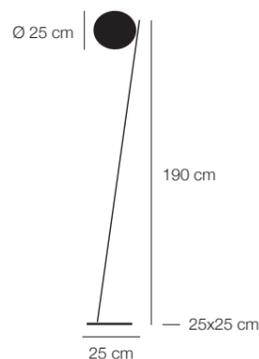


**Lederam F0 / standing lamp**

- LF012LVO / brass disc / black rod / black base/cable/dimmer
- LF02LVO / black disc / satin rod / black base/cable/dimmer
- LF03LVO / gold disc / black rod / black base/cable/dimmer
- LF04LVO / copper disc / black rod / black base/cable/dimmer
- LF06LVO / white disc / satin rod / white base / black cable/dimmer

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110-240V	constant current LED 500 mA	COB LED	1x17W	2500	2700	80	E	plug driver**	included (memory last step)

p. 107

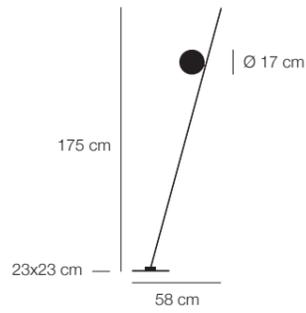


**Lederam F1 / standing lamp**

- LF12 / black disc / satin rod / black base/cable/dimmer
- LF13 / gold disc / black rod / black base/cable/dimmer
- LF14 / copper disc / black rod / black base/cable/dimmer
- LF15 / white disc / gold rod / white base/cable/dimmer
- LF16 / white disc / satin rod / white base/cable/dimmer

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
240V	mains voltage LED	LED module	1x17W	1550	2700	>80	F	-	included (memory last step)
(110V)	(mains voltage LED)	(LED module)	(1x14W)	(1540)	(2700)	(80)	(A+)	-	(included (memory last step))

p. 108

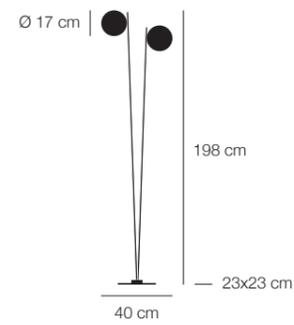


**Lederam F2 / standing lamp**

- LF22 / black discs / satin rods / black base/cable/dimmer
- LF23 / gold discs / black rods / black base/cable/dimmer
- LF24 / copper discs / black rods / black base/cable/dimmer
- LF25 / white discs / gold rods / white base/cable/dimmer
- LF26 / white discs / satin rods / white base/cable/dimmer

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
240V	mains voltage LED	LED module	2x17W 34W	3100	2700	>80	F	-	included (memory last step)
(110V available with on/off)	(mains voltage LED)	(LED module)	(2x14W 28W)	(3080)	(2700)	(80)	(A+)	-	(included (memory last step))

p. 110

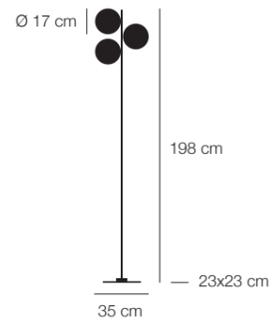

**Lederam F3 / standing lamp**

- LF32 / black discs / satin rod / black base/cable/dimmer
- LF33 / gold discs / black rod / black base/cable/dimmer
- LF34 / copper discs / black rod / black base/cable/dimmer
- LF35 / white discs / gold rod / white base/cable/dimmer
- LF36 / white discs / satin rod / white base/cable/dimmer


voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
240V	mains voltage LED	LED module	3x17W 51W	4650	2700	>80	F	-	included (memory last step)
(110V available with on/off)	(mains voltage LED)	(LED module)	(3x14W 42W)	(4620)	(2700)	(80)	(A+)	-	(included (memory last step))

# Sorry Giotto

[ Finishes ] // **Hand painting** is chosen for its deliberate textured effect and uniqueness of result. Any irregularities or unevenness in the coating cannot be considered defect, but rather a hallmark of the artisanal crafting process. / **Rough iron** (untreated metal) is chosen by the designer specifically because of its uniqueness and its natural ageing property. The appearance of any uneven rust patches does not constitute a defect, since it is a typical sign of the ageing process, which might be considerably accelerated in conditions of high humidity or direct exposure to outdoor weathering.

[ Note ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (\*) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard.

p. 115

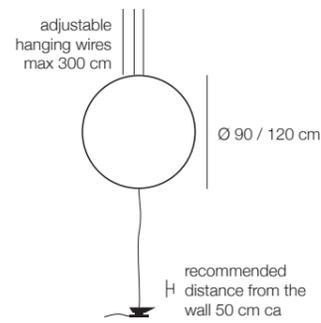

## Sorry Giotto 9 / 12 / pendant lamp with floor connection

SG9 / ring Ø 90 cm blue / black anvil / blue wires / black dimmer  
 SG12 / ring Ø 120 cm blue / black anvil / blue wires / black dimmer

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110-240V	constant current LED 350 mA	interch. LED	12x1W 12W	1680	2700	85	D	constant current plug driver*	included (memory last step)
			15x1W 15W	2100					

cable: from lamp to dimmer 250 cm /  
 from dimmer to plug driver 180 cm

p. 117




## Sorry Giotto 1 / table lamp

SG1 / blue ring / rough iron base / blue wire / black dimmer  
 SG1PL / blue ring / rough iron base / blue wire / black dimmer

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
220-240V (EU plug only)	constant current LED 350 mA	interch. LED	4x1W 4W	560	2700	85	D	constant current plug driver (EU plug only)	included (memory 100%)
110-240V (all other plugs)	constant current LED 350 mA	interch. LED	4x1W 4W	560	2700	85	D	constant current plug driver (all other plugs)*	included (memory last step)

p. 118

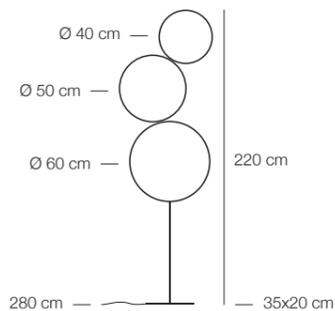

## Sorry Giotto 3 / standing lamp

SG3 / blue rings / black base and stem / blue wires / black dimmer


voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110-240V	constant current LED 350 mA	interch. LED	16x1W 16W	2240	2700	85	D	constant current plug driver*	included (memory last step)

# Light Stick

[ Finishes ] // **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request.

[ Note ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / ( \* ) Our LEDs can be dimmed by using compatible dimmers tested specifically to dim very low loads. We suggest checking the minimum load of the dimmer before installation. / ( \*\* ) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard.

p. 123

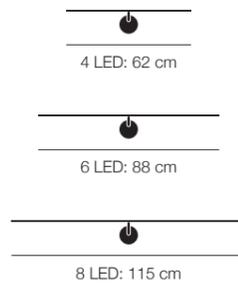

## Light Stick CW / wall or ceiling lamp

LSP4 / nickel rod and base

LSP4G / satin gold rod and base

LSP6 / nickel rod and base

LSP6G / satin gold rod and base


LSP8 / nickel rod and base

LSP8G / satin gold rod and base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
240V (110V available with not dimmable driver)	constant current LED 350 mA	interch. LED	4x1W 4W	560	2700	85	D	constant current driver	YES IGBT/Triac*
			6x1W 6W	840					
240V (110V available on request)	constant current LED 350 mA	interch. LED	8x1W 8W	1120	2700	85	D	constant current driver	YES IGBT/Triac*

base Ø 9x3,5 cm / H ledge 17 cm

p. 125



## Light Stick V / wall lamp


LSPV6 / nickel vertical rod and base

LSPV6G / satin gold vertical rod and base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
240V (110V available with not dimmable driver)	constant current LED 350 mA	interch. LED	6x1W 6W	840	2700	85	D	constant current driver	YES IGBT/Triac*

H ledge 17 cm

p. 126




## Light Stick T / table lamp

LS6 / nickel rod / black base / black cable / black dimmer

LS6G / satin gold rod / black base / black cable / black dimmer

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110-240V	constant current LED 350 mA	interch. LED	6x1W 6W	840	2700	85	D	constant current plug driver**	included (memory last step)

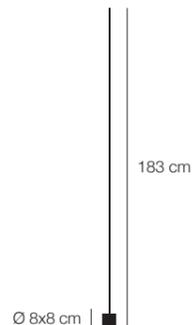

## Light Stick F / standing lamp

LSF10B / black rod / black base / black wires / black dimmer

LSF10 / nickel rod / black base / black wires / black dimmer

LSF10G / satin gold rod / black base / black wires / black dimmer

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110-240V	constant current LED 350 mA	interch. LED	10x1W 10W	1400	2700	85	D	constant current plug driver**	included (memory last step)

## Wa Wa

[ Finishes ] // **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity. / **Copper** is a very malleable and ductile metal, chosen for its high thermal and electrical conductivity, as well as for its typical reddish-orange colour. We use it untreated, therefore it may oxidise with time, forming a green patina. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity.

[ Note ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / ( \* ) Our LEDs can be dimmed by using compatible dimmers tested specifically to dim very low loads. We suggest checking the minimum load of the dimmer before installation. / ( \*\* ) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard.



## Wa Wa T / table lamp

WW / nickel structure, base and sticks / glass lens / blue wires / black dimmer

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110-240V	constant current LED 350 mA	interch. LED	3x1W 3W	420	2700	85	D	constant current plug driver**	included (memory last step)



## Wa Wa F / standing lamp


WWF / nickel structure, base and sticks / glass lens / black wires / black dimmer

WWFBR / brass base and structure / copper sticks / glass lens / black wires / black dimmer

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110-240V	constant current LED 350 mA	interch. LED	5x1W 5W	700	2700	85	D	constant current plug driver**	included (memory last step)




p. 134

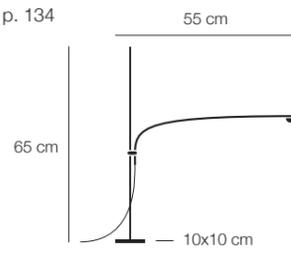**Uau T / table lamp**

UAU / nickel structure and base / glass lens / blue wire / black dimmer

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110-240V	constant current LED 350 mA	interch. LED	1x1W	140	2700	85	D	constant current plug driver**	included (memory last step)

p. 135

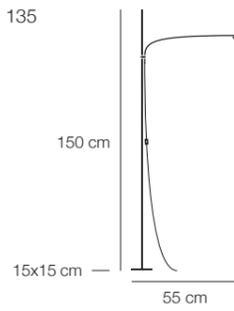**Uau F / standing lamp**


UAUF / nickel structure and base / glass lens / blue wire / black dimmer

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110-240V	constant current LED 350 mA	interch. LED	1x1W	140	2700	85	D	constant current plug driver**	included (memory last step)

## Giulietta

[ Note ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website).

p. 139


**Giulietta BE T / battery table lamp**

GBB / black hoop and base / brass rod

GBBR / vintage brass hoop and base / brass rod

battery	source	type	watt	lumen	K	CRI	en. class	battery charger	dimmer
Li-ION 3,7V 4100 mAh	constant voltage LED	LED board	1x2,6W	189	2700	>90	G	input 110/240V output 5V@1,2 A (EU plug only)	included touch

p. 141

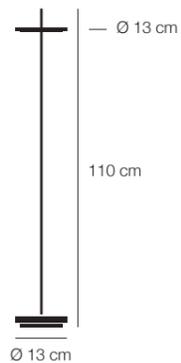


**Giuletta BE F / battery standing lamp**

GBFB / black hoop and base / brass rod  
 GBFBR / vintage brass hoop and base / brass rod

battery	source	type	watt	lumen	K	CRI	en. class	battery charger	dimmer
Li-ION 3,7V 4100 mAh	constant voltage LED	LED board	1x2,6W	189	2700	>90	G	input 110/240V output 5V@1,2 A (EU plug only)	included touch

p. 142

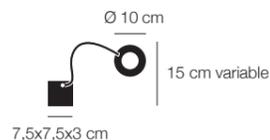

**Giuletta W / wall lamp**

GPB / black structure / black hoop  
 GPNC / black structure / nickel hoop

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V or 240V	constant voltage LED 5V	LED board	1x2,6W	189	2700	>90	G	constant voltage driver	included touch-less (memory last step)

p. 143




**Giuletta T / USB table lamp**

GB / black structure / black hoop / black wire  
 GNC / black structure / nickel hoop / black wire

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110-240V	constant voltage LED 5V	LED board	1x2,6W	189	2700	>90	G	USB plug driver (EU plug only)	included touch-less (memory last step)

p. 145

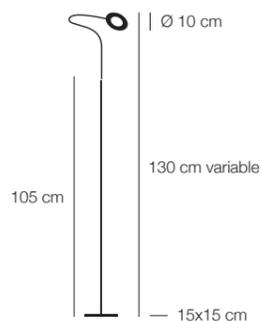

**Giuletta F / USB standing lamp**

GFB / nickel base and rod / black flex / black hoop / black wire  
 GFNC / nickel base and rod / black flex / nickel hoop / black wire


voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110-240V	constant voltage LED 5V	LED board	1x2,6W	189	2700	>90	G	USB plug driver (EU plug only)	included touch-less (memory last step)

# Jackie O

[ Finishes ] // **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Satin steel** - the standard modular metal bases are composed of a satin steel plate mounted on a white lacquered metal frame and fixed to it by nickel square-head screws. On request we can supply the plate white matt lacquered as the frame.

[ Note ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / ( \* ) Our LEDs can be dimmed by using compatible dimmers tested specifically to dim very low loads. We suggest checking the minimum load of the dimmer before installation.

p. 149

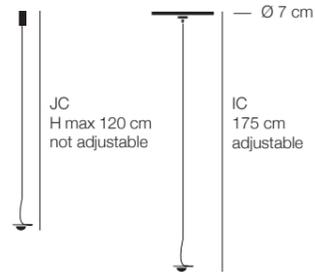


## Jackie O JC / IC / pendant lamp

JOJCLVO / mod. JC / nickel jack connection / blue wire / nickel curl  
 JOICLVO / mod. IC / nickel plate with tensioner / blue wire / nickel curl

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
	-	constant voltage 24V LED	LED Jack/interch.	1x1W	143	2700	>80	G	not included available on request	-
			interch. LED							

installation hole Jackie O JC Ø 1,25 cm  
 installation hole Jackie O IC Ø 5,5 cm

p. 150

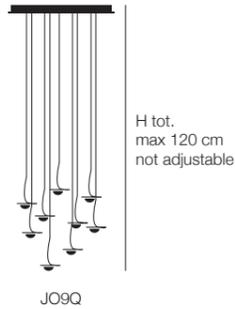


## Jackie O Chandelier 6 / 9 / 12 / pendant lamp

JO6QLVO / satin steel base 30x30 cm / blue wires / nickel curls  
 JO9QLVO / satin steel base 30x30 cm / blue wires / nickel curls  
 JO12QLVO / satin steel base 30x30 cm / blue wires / nickel curls

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
	240V (available 110V DALI dimmable)	constant voltage 24V LED	LED Jack/interch.	6x1W 6W	858	2700	>80	G	constant voltage driver	YES IGBT/Triac*
				9x1W 9W	1287					
				12x1W 12W	1716					

p. 150

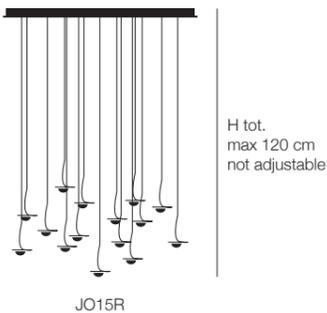

## Jackie O Chandelier 15 / 20 / 24 / pendant lamp

JO15QLVO / satin steel base 60x60 cm / blue wires / nickel curls  
 JO15RLVO / satin steel base 150x30 cm / blue wires / nickel curls  
 JO20QLVO / satin steel base 60x60 cm / blue wires / nickel curls  
 JO20RLVO / satin steel base 150x30 cm / blue wires / nickel curls  
 JO24QLVO / satin steel base 60x60 cm / blue wires / nickel curls  
 JO24RLVO / satin steel base 150x30 cm / blue wires / nickel curls


	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
	110V or 240V	constant voltage 24V LED	LED Jack/interch.	15x1W 15W	2145	2700	>80	G	constant voltage driver	YES IGBT/Triac*
				20x1W 20W	2860					
				24x1W 24W	3432					

## PostKrisi

[ Finishes ] // **Hand painting** is chosen for its deliberate textured effect and uniqueness of result. Any irregularities or unevenness in the coating cannot be considered defect, but rather a hallmark of the artisanal crafting process. / **Brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity. / **Copper** is a very malleable and ductile metal, chosen for its high thermal and electrical conductivity, as well as for its typical reddish-orange colour. We use it untreated, therefore it may oxidise with time, forming a green patina. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity. / **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Satin steel** - the standard modular metal bases are composed of a satin steel plate mounted on a white lacquered metal frame and fixed to it by nickel square-head screws. On request we can supply the plate white matt lacquered as the frame.

[ Note ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / ( \* ) LED bulbs can be dimmed using compatible dimmers, which have been tested specifically for dimming very low loads. The manufacturers of LED bulbs are required to draw up a list of suggested dimmers for the dimming of their products, with an indication of the maximum number of bulbs dimmable with the various types of dimmer. / ( \*\* ) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard.

p. 156

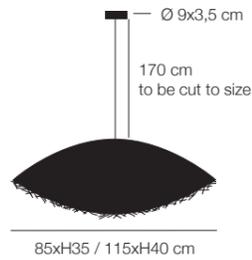


### PostKrisi 50 / 51 / pendant lamp

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
PK50LN / PostKrisi 50 / shade 85x35 cm natural / grey braided cable / nickel base	110V (bulb not supplied)-240V	mains voltage LED	E27 bulb	1x8W	900	2700	>80	E	-	YES IGBT/Triac*
PK51LN / PostKrisi 51 / shade 115x40 cm natural / grey braided cable / nickel base										
PK50LW / PostKrisi 50 / shade 85x35 cm white / grey braided cable / nickel base	110V (bulb not supplied)-240V	mains voltage LED	E27 bulb silver crowned	1x7W	600	2700	80	F	-	YES IGBT/Triac*
PK51LW / PostKrisi 51 / shade 115x40 cm white / grey braided cable / nickel base										
PK50LG / PostKrisi 50 / shade 85x35 cm gold / grey braided cable / nickel base										
PK51LG / PostKrisi 51 / shade 115x40 cm gold / grey braided cable / nickel base										
PK50LS / PostKrisi 50 / shade 85x35 cm silver / grey braided cable / nickel base										
PK51LS / PostKrisi 51 / shade 115x40 cm silver / grey braided cable / nickel base										

weight: PK50 1,5 kg / PK51 2,8 kg

p. 156

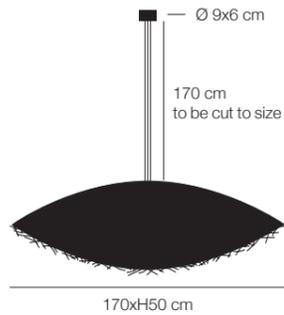


### PostKrisi 52 / pendant lamp

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
PK52LN / natural shade / grey braided cables / nickel base	110V (bulbs not supplied)-240V	mains voltage LED	E27 bulb	3x8W 24W	2700	2700	>80	E	-	YES IGBT/Triac*
PK52LW / white shade / grey braided cables / nickel base	110V (bulbs not supplied)-240V	mains voltage LED	E27 bulb silver crowned	3x7W 21W	1800	2700	80	F	-	YES IGBT/Triac*
PK52LG / gold shade / grey braided cables / nickel base										
PK52LS / silver shade / grey braided cables / nickel base										

weight 3 kg


p. 161



### PostKrisi 10 Malagolina / table lamp

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
PKM10LN / natural shade / nickel base and structure / blue wire / black dimmer	110-240V	constant current LED 350 mA	interch. LED	2x1W 2W	280	2700	85	D	constant current plug driver**	included (memory last step)
PKM10LW / white shade / nickel base and structure / blue wire / black dimmer										
PKM10LG / gold shade / nickel base and structure / blue wire / black dimmer										
PKM10LS / silver shade / nickel base and structure / blue wire / black dimmer										

p. 162

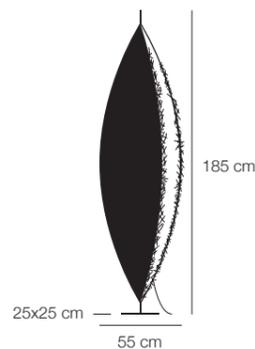


**PostKrisi F 100 / standing lamp**

- PKF100W / white shade / nickel base and structure / black wires / black dimmer
- PKF100G / gold shade / nickel base and structure / black wires / black dimmer
- PKF100S / silver shade / nickel base and structure / black wires / black dimmer

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
	110-240V	constant current LED 350 mA	interch. LED	8x1W 8W	1120	2700	85	D	constant current plug driver**	included (memory last step)

p. 164

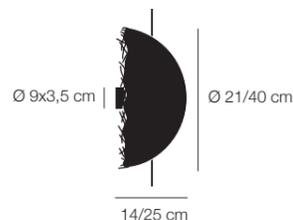


**PostKrisi W 21 / 40 / wall lamp**

- PKP21LN / PostKrisi W 21 / shade Ø 21 cm natural / nickel base
- PKP21LW / PostKrisi W 21 / shade Ø 21 cm white / nickel base
- PKP21LG / PostKrisi W 21 / shade Ø 21 cm gold / nickel base
- PKP21LS / PostKrisi W 21 / shade Ø 21 cm silver / nickel base
- PKP40LW / PostKrisi W 40 / shade Ø 40 cm white / nickel base
- PKP40LG / PostKrisi W 40 / shade Ø 40 cm gold / nickel base
- PKP40LS / PostKrisi W 40 / shade Ø 40 cm silver / nickel base

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
	110-240V	constant current LED 350 mA	interch. LED	2x1W 2W	280	2700	85	D	constant current driver	NO av. on request

Ø 21 cm: rod H 22 cm  
Ø 40 cm: rod H 60 cm

p. 167




**PostKrisi CW 70 / ceiling or wall lamp**

- PKCW7LVOG / gold shade
- PKCW7LVOS / silver shade

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
	240V (available 110V DALI dimmable)	constant current LED 450 mA	COB LED	1x15W	2187	2700	80	D	constant current LED driver	YES Triac

p. 168




**PostKrisi 49 / pendant lamp**

- PK494LWG / shade Ø 40 cm white/gold / white braided cable / white base
- PK494LWS / shade Ø 40 cm white/silver / white braided cable / white base
- PK496LWG / shade Ø 60 cm white/gold / white braided cable / white base
- PK496LWS / shade Ø 60 cm white/silver / white braided cable / white base

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
	110V (bulb not supplied)-240V	mains voltage LED	E27 bulb silver crowned	1x7W	600	2700	80	F	-	YES IGBT/Triac*

weight: Ø 40 cm 1 kg / Ø 60 cm 1,5 kg

p. 168




PostKrisi 49 / pendant lamp

- PK498LWG / shade Ø 80 cm white/gold / white braided cable / white base
- PK498LWS / shade Ø 80 cm white/silver / white braided cable / white base
- PK4910LWG / shade Ø 100 cm white/gold / white braided cable / white base
- PK4910LWS / shade Ø 100 cm white/silver / white braided cable / white base

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
	110V (bulbs not supplied)-240V	mains voltage LED	E27 bulb silver crowned	3x7W 21W	1800	2700	80	F	-	YES IGBT/Triac*

weight: Ø 80 cm 2,8 kg / Ø 100 cm 3 kg

p. 171




PostKrisi T 61 / table lamp

- PK61LN / natural shades / black base / brass rod / black cable and dimmer
- PK61LNNC / natural shades / nickel rod and base / black cable and dimmer
- PK61LW / white shades / black base / brass rod / black cable and dimmer
- PK61LWNC / white shades / nickel rod and base / black cable and dimmer

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
	110V (bulbs not supplied)-240V	mains voltage LED	E27 bulb	3x8W 24W	2700	2700	>80	E	-	included (memory last step)

p. 172

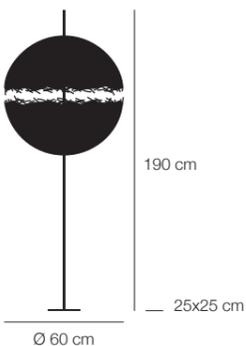


PostKrisi F 64 / standing lamp

- PK64LN / natural shades / black base / brass rod / black cable and dimmer
- PK64LNNC / natural shades / nickel rod and base / black cable and dimmer
- PK64LW / white shades / black base / brass rod / black cable and dimmer
- PK64LWNC / white shades / nickel rod and base / black cable and dimmer

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
	110V (bulbs not supplied)-240V	mains voltage LED	E27 bulb	3x8W 24W	2700	2700	>80	E	-	included (memory last step)

p. 174

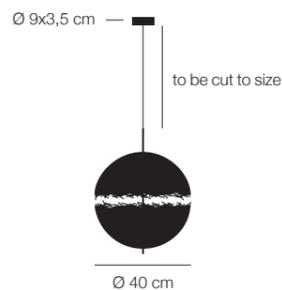


PostKrisi 65 / pendant lamp

- PK65LN / shades Ø 40 cm natural / brass structure / black cable and base
- PK65LNNC / shades Ø 40 cm natural / nickel structure and base / black cable
- PK65LW / shades Ø 40 cm white / brass structure / black cable and base
- PK65LWNC / shades Ø 40 cm white / nickel structure and base / black cable

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
	110V (bulbs not supplied)-240V	mains voltage LED	E27 bulb	3x8W 24W	2700	2700	>80	E	-	YES IGBT/Triac*

H 200 cm / H rod 63 cm / weight 2,5 kg

p. 174

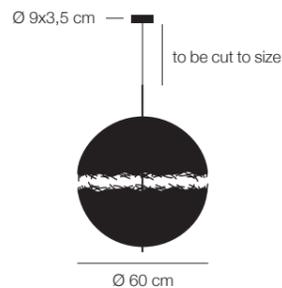


**PostKrisi 66 / pendant lamp**

- PK66LN / shades Ø 60 cm natural / brass structure / black cable and base
- PK66LNNC / shades Ø 60 cm natural / nickel structure and base / black cable
- PK66LW / shades Ø 60 cm white / brass structure / black cable and base
- PK66LWNC / shades Ø 60 cm white / nickel structure and base / black cable

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
	110V (bulbs not supplied)-240V	mains voltage LED	E27 bulb	3x8W 24W	2700	2700	>80	E	-	YES IGBT/Triac*

H 210 cm / H rod 83 cm / weight 3,5 kg

p. 174

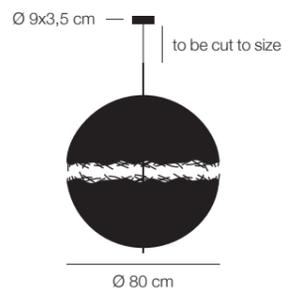


**PostKrisi 67 / pendant lamp**

- PK67LN / shades Ø 80 cm natural / brass structure / black cable and base
- PK67LNNC / shades Ø 80 cm natural / nickel structure and base / black cable
- PK67LW / shades Ø 80 cm white / brass structure / black cable and base
- PK67LWNC / shades Ø 80 cm white / nickel structure and base / black cable

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
	110V (bulbs not supplied)-240V	mains voltage LED	E27 bulb	3x8W 24W	2700	2700	>80	E	-	YES IGBT/Triac*

H 220 cm / H rod 100 cm / weight 5 kg

p. 176

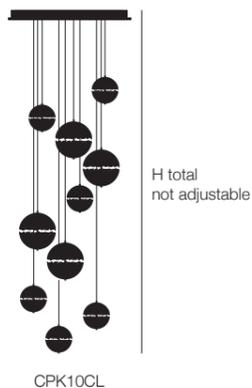

**PostKrisi Chandelier / pendant lamp**

- CPK3QL / satin base 30x30 cm / 3x PK14 / H 180 cm
- CPK5QL / satin base 30x30 cm / 5x PK14 / H 180 cm
- CPK7CL / satin base Ø 40 cm / 7x PK14 / H 180 cm
- CPK7QL / satin base 60x60 cm / 7x PK14 / H 180 cm
- CPK7RL / satin base 90x30 cm / 3x PK20 and 4x PK14 / H 180 cm
- CPK10CL / satin base Ø 78 cm / 4x PK20 and 6x PK14 / H 300 cm

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
	110V or 240V	12V DC LED bulb	G4 bulb	3x max 1W 3W	207	2700	80	G	low voltage driver	NO
	240V (110V available with not dimmable driver)	12V DC LED bulb	G4 bulb	5x max 1W 5W	345	2700	80	G	low voltage driver	YES Triac
7x max 1W 7W				483						
10x max 1W 10W				690						

PK14 = PostKrisi sphere Ø 14 cm natural with jack

PK20 = PostKrisi sphere Ø 20 cm natural with jack


## Fil de Fer

[ Finishes ] // **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Rough iron** (untreated metal) is chosen by the designer specifically because of its uniqueness and its natural ageing property. The appearance of any uneven rust patches does not constitute a defect, since it is a typical sign of the ageing process, which might be considerably accelerated in conditions of high humidity or direct exposure to outdoor weathering.

[ Cables ] // ( **s** ) suspension cable. / ( **el** ) electrical cable.

[ Note ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website).

p. 180

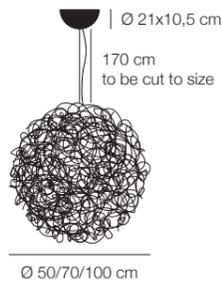


### Fil de Fer / pendant lamp

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
F5SL / Ø 50 cm aluminium / steel cable <sup>(s)</sup> / grey braided cable <sup>(el)</sup> / nickel base	240V (110V available with not dimmable driver)	12V DC LED bulb	G4 bulb	12x max 1W 12W	828	2700	80	G	electronic 12V DC low voltage	YES Triac
F5SLG / Ø 50 cm matt gold anodized / steel cable <sup>(s)</sup> / gold braided cable <sup>(el)</sup> / gold-plated base				18x max 1W 18W	1242					
F7SL / Ø 70 cm aluminium / steel cable <sup>(s)</sup> / grey braided cable <sup>(el)</sup> / nickel base				24x max 1W 24W	1656					
F7SLG / Ø 70 cm matt gold anodized / steel cable <sup>(s)</sup> / gold braided cable <sup>(el)</sup> / gold-plated base										
F10SL / Ø 100 cm aluminium / steel cable <sup>(s)</sup> / grey braided cable <sup>(el)</sup> / nickel base										
F10SLG / Ø 100 cm matt gold anodized / steel cable <sup>(s)</sup> / gold braided cable <sup>(el)</sup> / gold-plated base										

weight: Ø 50 8 kg / Ø 70 10 kg / Ø 100 16 kg

p. 185

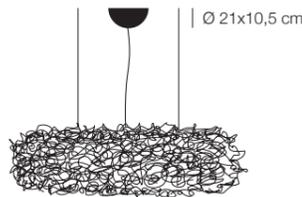

### Fil de Fer Nuvola / pendant lamp


	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
FNVAL / mod. A / aluminium / steel cables <sup>(s)</sup> / grey braided cable <sup>(el)</sup> / nickel base	110V* or 240V	12V DC LED bulb	G4 bulb	24x max 1W 24W	1656	2700	80	G	electronic 12V DC low voltage	YES Triac
FNVEL / mod. E / aluminium / steel cables <sup>(s)</sup> / grey braided cable <sup>(el)</sup> / nickel base				36x max 1W 36W	2484					
FNVFL / mod. F / aluminium / steel cables <sup>(s)</sup> / grey braided cable <sup>(el)</sup> / nickel base				44x max 1W 44W	3036					

\* mod. A 110V available with not dimmable driver

Further dimensions and gold finish available on request.

mod. A / 120x50x H 35 cm / weight 10 kg  
mod. E / 200x80x H 50 cm / weight 14 kg  
mod. F / 240x140x H 50 cm / weight 21 kg  
cables 170 cm to be cut to size


p. 189



### Fil de Fer F / floor lamp

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
F3L / Ø 30 cm aluminium / grey braided cable / black dimmer	110-240V	12V DC LED bulb	G4 bulb	8x max 1W 8W	552	2700	80	G	low voltage plug driver	included (memory last step)
F3LG / Ø 30 cm gold / gold braided cable / black dimmer				10x1W 10 max W	690					
F5L / Ø 50 cm aluminium / grey braided cable / black dimmer				15x1W 15 max W	1035					
F5LG / Ø 50 cm gold / gold braided cable / black dimmer				20x max 1W 20W	1380					
F7L / Ø 70 cm aluminium / grey braided cable / black dimmer										
F7LG / Ø 70 cm gold / gold braided cable / black dimmer										
F10L / Ø 100 cm aluminium / grey braided cable / black dimmer										
F10LG / Ø 100 cm gold / gold braided cable / black dimmer										

12V cable: 170 cm / plug cable: 180 cm

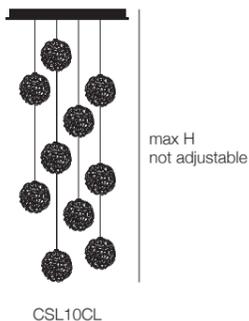


**Sweet Light Chandelier / pendant lamp**

- CSL3QL / 3x Sweet Light Ø 10 cm / satin base 30x30 cm / H 180 cm
- CSL5QL / 5x Sweet Light Ø 10 cm / satin base 30x30 cm / H 180 cm
- CSL7CL / 7x Sweet Light Ø 10 cm / satin base Ø 40 cm / H 180 cm
- CSL7QL / 7x Sweet Light Ø 10 cm / satin base 60x60 cm / H 180 cm
- CSL10CL / 10x Sweet Light Ø 10 cm / satin base Ø 78 cm / H 180 cm
- CSL15QL / 15x Sweet Light Ø 10 cm / satin base 60x60 cm / H 300 cm
- CSL20CL / 20x Sweet Light Ø 10 cm / satin base Ø 78 cm / H 300 cm
- CSL35CL / 35x Sweet Light Ø 10 cm / satin base Ø 78 cm / H 400 cm

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V or 240V	12V DC LED bulb	G4 bulb	3x max 1W 3W	207	2700	80	G	low voltage driver	YES Triac
240V (110V available with not dimmable driver)	12V DC LED bulb	G4 bulb	5x max 1W 5W	345	2700	80	G	low voltage driver	YES Triac
			7x max 1W 7W	483					
			10x max 1W 10W	690					
			15x max 1W 15W	1035					
			20x max 1W 20W	1380					
35x max 1W 35W	2415								

Standard version with aluminium Sweet Light spheres.

For further models see also PostKrisi Chandelier page 48.




**Sweet Light T / table lamp**

- SLL / Ø 10 cm aluminium / blue wire
- SLLBR / Ø 10 cm brass / blue wire
- SLLS / Ø 10 cm silver / blue wire

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110-240V	12V DC LED bulb	G4 bulb	1x max 1W	69	2700	80	G	low voltage plug driver	included touch (on the sphere)

cable: 250 cm

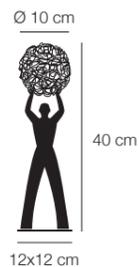

**Uomo della Luce S / table lamp**

- USL / rough iron structure / sphere Ø 10 cm aluminium / black dimmer / black wires


voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110-240V	12V DC LED bulb	G4 bulb	1x max 1W	69	2700	80	G	low voltage plug driver	included (memory last step)

# Lucenera

[ Finishes ] // **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Carbon tubes**. The production of the tubes is partially craftmade. Any imperfection in the texture is a peculiarity of the product and sign of craftsmanship. The quality of the tubes is guaranteed by using LED bulbs only, preferably with the max wattage included in our standard products.

[ Note ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (\*) LED bulbs can be dimmed using compatible dimmers, which have been tested specifically for dimming very low loads. The manufacturers of LED bulbs are required to draw up a list of suggested dimmers for the dimming of their products, with an indication of the maximum number of bulbs dimmable with the various types of dimmer.


p. 199

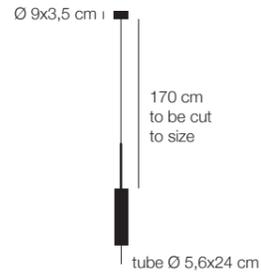

## Lucenera 504 / pendant lamp

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
L504L / black tube and base / metal braided cable / nickel details	110V (bulb not supplied)-240V	mains voltage LED	GU10 bulb	1x5,5W	375	3000	>90	G	-	YES IGBT/Triac*
L504LW / white tube and base / metal braided cable / nickel details										

p. 200

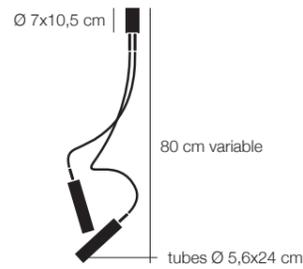

## Lucenera 206 / ceiling lamp

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
L20680L / black tubes/base/flexible pipes / nickel details	110V (bulbs not supplied)-240V	mains voltage LED	GU10 bulb	2x5,5W 11W	750	3000	>90	G	-	YES IGBT/Triac*
L20680LW / white tubes/base/flexible pipes / nickel details										

p. 202-203




## Lucenera 502 / 503 / wall lamp

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
L502L / Lucenera 502 / black tube/base/rod / nickel details	110V (bulb not supplied)-240V	mains voltage LED	GU10 bulb	1x5,5W	375	3000	>90	G	-	NO on/off switch included
L502LW / Lucenera 502 / white tube/base/rod / nickel details										
L503L / Lucenera 503 / black tubes/base/rods / nickel details	110V (bulbs not supplied)-240V	mains voltage LED	GU10 bulb	2x5,5W 11W	750	3000	>90	G	-	NO on/off switch included
L503LW / Lucenera 503 / white tubes/base/rods / nickel details										



p. 205

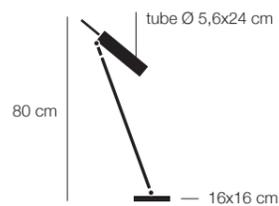


## Lucenera 500 / table lamp

L500L / black tube/base/stand / nickel details

L500LW / white tube/base/stand / nickel details

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
240V (110V available with on/off - bulb not supplied)	mains voltage LED	GU10 bulb	1x5,5W	375	3000	>90	G	-	included (memory 0%)

p. 207

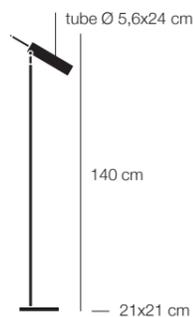

## Lucenera 506 / standing lamp

L506L / black tube/base/stand / nickel details

L506LW / white tube/base/stand / nickel details

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110V (bulb not supplied)-240V	mains voltage LED	GU10 bulb	1x5,5W	375	3000	>90	G	-	included (memory last step)


## Stchu-Moon

[ Finishes ] // **Rough iron** (untreated metal) is chosen by the designer specifically because of its uniqueness and its natural ageing property. The appearance of any uneven rust patches does not constitute a defect, since it is a typical sign of the ageing process, which might be considerably accelerated in conditions of high humidity or direct exposure to outdoor weathering. / **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request.

[ Cables ] // ( **s** ) suspension cable. / ( **el** ) electrical cable.

[ Note ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / ( **\*** ) LED bulbs can be dimmed using compatible dimmers, which have been tested specifically for dimming very low loads. The manufacturers of LED bulbs are required to draw up a list of suggested dimmers for the dimming of their products, with an indication of the maximum number of bulbs dimmable with the various types of dimmer. / ( **\*\*** ) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard.

p. 211



## Stchu-Moon 02 / pendant lamp

SM24LS / Ø 40 cm silver (exterior black) / steel spoons / black cable and base

SM24LG / Ø 40 cm gold (exterior black) / steel spoons / black cable and base

SM24LC / Ø 40 cm copper (exterior black) / steel spoons / black cable and base

SM26LS / Ø 60 cm silver (exterior black) / steel spoons / black cable and base


SM26LG / Ø 60 cm gold (exterior black) / steel spoons / black cable and base

SM26LC / Ø 60 cm copper (exterior black) / steel spoons / black cable and base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
240V (110V available on request)	24V DC LED board	LED board	2x4W 8W	840	2700	>80	F	electronic 24V DC low voltage	YES Triac

weight: Ø 40 cm 2 kg / Ø 60 cm 3,5 kg

p. 211

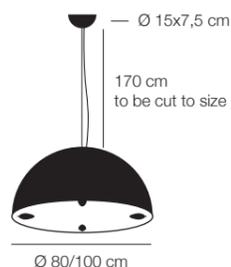


**Stchu-Moon 02 / pendant lamp**

- SM28LS / Ø 80 cm silver (exterior black) / steel spoons / steel cable<sup>(6)</sup> / black cable<sup>(6)</sup> and base
- SM28LG / Ø 80 cm gold (exterior black) / steel spoons / steel cable<sup>(6)</sup> / black cable<sup>(6)</sup> and base
- SM28LC / Ø 80 cm copper (exterior black) / steel spoons / steel cable<sup>(6)</sup> / black cable<sup>(6)</sup> and base
- SM210LS / Ø 100 cm silver (exterior black) / steel spoons / steel cable<sup>(6)</sup> / black cable<sup>(6)</sup> and base
- SM210LG / Ø 100 cm gold (exterior black) / steel spoons / steel cable<sup>(6)</sup> / black cable<sup>(6)</sup> and base
- SM210LC / Ø 100 cm copper (exterior black) / steel spoons / steel cable<sup>(6)</sup> / black cable<sup>(6)</sup> and base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
240V (110V available on request)	24V DC LED board	LED board	4x4W 16W	1680	2700	>80	F	electronic 24V DC low voltage	YES Triac

weight: Ø 80 cm 6,5 kg / Ø 100 cm 7,5 kg

p. 213




**Stchu-Moon 02 230V / pendant lamp**

- SM24230LS / Ø 40 cm silver (exterior black) / black cable / nickel base
- SM24230LG / Ø 40 cm gold (exterior black) / black cable / nickel base
- SM24230LC / Ø 40 cm copper (exterior black) / black cable / nickel base
- SM26230LS / Ø 60 cm silver (exterior black) / black cable / nickel base
- SM26230LG / Ø 60 cm gold (exterior black) / black cable / nickel base
- SM26230LC / Ø 60 cm copper (exterior black) / black cable / nickel base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V (bulb not supplied)-240V	mains voltage LED	E27 bulb silver crowned	1x7W	600	2700	80	F	-	YES IGBT/Triac*

weight: Ø 40 cm 1,8 kg / Ø 60 cm 2,8 kg

p. 213

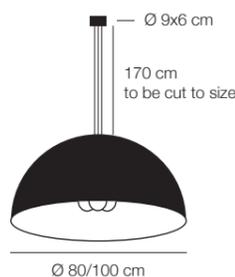


**Stchu-Moon 02 230V / pendant lamp**

- SM28230LS / Ø 80 cm silver (exterior black) / black cables / nickel base
- SM28230LG / Ø 80 cm gold (exterior black) / black cables / nickel base
- SM28230LC / Ø 80 cm copper (exterior black) / black cables / nickel base
- SM210230LS / Ø 100 cm silver (exterior black) / black cables / nickel base
- SM210230LG / Ø 100 cm gold (exterior black) / black cables / nickel base
- SM210230LC / Ø 100 cm copper (exterior black) / black cables / nickel base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V (bulbs not supplied)-240V	mains voltage LED	E27 bulb silver crowned	3x7W 21W	1800	2700	80	F	-	YES IGBT/Triac*

weight: Ø 80 cm 6,5 kg / Ø 100 cm 7,5 kg

p. 214

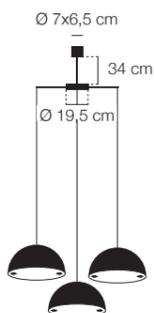


**Stchu-Moon 02 Chandelier / pendant lamp**

- SM234LS / Ø 40 cm silver (exterior black) / steel spoons / black cables and structure
- SM234LG / Ø 40 cm gold (exterior black) / steel spoons / black cables and structure
- SM234LC / Ø 40 cm copper (exterior black) / steel spoons / black cables and structure
- SM236LS / Ø 60 cm silver (exterior black) / steel spoons / black cables and structure
- SM236LG / Ø 60 cm gold (exterior black) / steel spoons / black cables and structure
- SM236LC / Ø 60 cm copper (exterior black) / steel spoons / black cables and structure

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
240V (110V available on request 1..10V or push dimm.)	24V DC LED board	LED board	6x4W 24W	2520	2700	>80	F	electronic 24V DC low voltage	YES Triac

3x Ø 40 cm  
H max 190 cm / tot. Ø 105 cm / weight 13,5 cm  
3x Ø 60 cm  
H max 200 cm / tot. Ø 145 cm / weight 18,5 cm

p. 219




**Stchu-Moon 05** / wall lamp

- SM5LS / silver (exterior white) / steel spoon / white base
- SM5LG / gold (exterior white) / steel spoon / white base
- SM5LC / copper (exterior white) / steel spoon / white base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
240V (110V available on request 1..10V or push dimm.)	24V DC LED board	LED board	1x4W	420	2700	>80	F	electronic 24V DC low voltage	YES Triac

p. 220

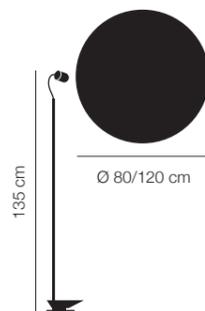


**Stchu-Moon 08** / wall/standing lamp

- SM88LS / Ø 80 cm silver (exterior grey matt) / nickel light structure / black anvil
- SM88LG / Ø 80 cm gold (exterior grey matt) / nickel light structure / black anvil
- SM88LC / Ø 80 cm copper (exterior grey matt) / nickel light structure / black anvil
- SM812LS / Ø 120 cm silver (exterior grey matt) / nickel light structure / black anvil
- SM812LG / Ø 120 cm gold (exterior grey matt) / nickel light structure / black anvil
- SM812LC / Ø 120 cm copper (exterior grey matt) / nickel light structure / black anvil

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110-240V	low voltage LED 12V	GU5.3 bulb	1x7,5W	630	3000	90	F	-	included (memory last step)

H recommended distance from lamp to disc 25 cm ca

p. 221



**Stchu-Moon R** / recessed lamp for plasterboard ceiling


- SM114S / Ø 14 cm silver (bulb not included)
- SM114G / Ø 14 cm gold (bulb not included)
- SM114C / Ø 14 cm copper (bulb not included)
- LS4 / LED bulb

net price

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
-	mains voltage	GU10 bulb not included	-	-	-	-	-	-	-
220-240V	mains voltage LED	GU10 bulb	5,5W	375	3000	>90	G	-	YES IGBT/Triac*

installation hole Ø 13 cm / depth 15 cm


p. 222

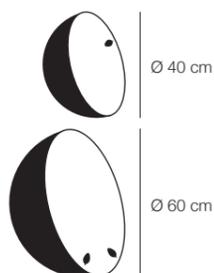

**Stchu-Moon 01** / floor lamp

- SM14LS / Ø 40 cm silver (ext. black) / steel spoon / metal braided cable / black dimmer/cable
- SM14LG / Ø 40 cm gold (ext. black) / steel spoon / metal braided cable / black dimmer/cable
- SM14LC / Ø 40 cm copper (ext. black) / steel spoon / metal braided cable / black dimmer/cable
- SM16LS / Ø 60 cm silver (ext. black) / steel spoons / metal braided cable / black dimmer/cable
- SM16LG / Ø 60 cm gold (ext. black) / steel spoons / metal braided cable / black dimmer/cable
- SM16LC / Ø 60 cm copper (ext. black) / steel spoons / metal braided cable / black dimmer/cable

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110-240V	24V DC LED board	LED board	1x4W	420	2700	>80	F	low voltage plug driver**	included (memory last tep)
			2x4W 8W	840					

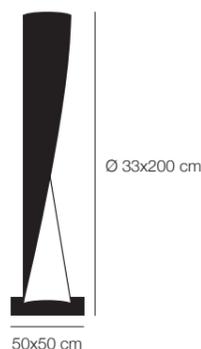

## Stchu-Moon 09 / standing lamp


SM9LS / silver (rough iron ext.) / steel spoons / metal braided cable / black dimmer/cable  
 SM9LG / gold (rough iron ext.) / steel spoons / metal braided cable / black dimmer/cable  
 SM9LC / copper (rough iron ext.) / steel spoons / metal braided cable / black dimmer/cable

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110-240V	24V DC LED board (1x candle included)	LED board	2x4W 8W	840	2700	>80	F	low voltage plug driver**	included (memory last step)

## Macchina della Luce

[ Finishes ] // **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity.

[ Note ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / ( \* ) LED bulbs can be dimmed using compatible dimmers, which have been tested specifically for dimming very low loads. The manufacturers of LED bulbs are required to draw up a list of suggested dimmers for the dimming of their products, with an indication of the maximum number of bulbs dimmable with the various types of dimmer.

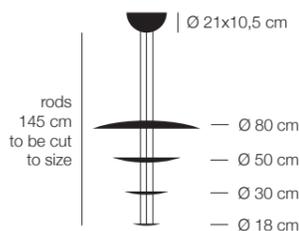


## Macchina della Luce mod. A / pendant lamp

MALG / discs Ø 80-50-30-18 cm / gold / nickel base / brass rods  
 MALS / discs Ø 80-50-30-18 cm / silver / nickel base / aluminium rods  
 MALC / discs Ø 80-50-30-18 cm / copper / nickel base / brass rods

MALG110V / discs Ø 80-50-30-18 cm / gold / nickel base / brass rods  
 MALS110V / discs Ø 80-50-30-18 cm / silver / nickel base / aluminium rods  
 MALC110V / discs Ø 80-50-30-18 cm / copper / nickel base / brass rods

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
220-240V	24V DC LED board	LED board	7x6W 42W	4410	2700	80	F	electronic 24V DC low voltage	YES Triac
110V	24V DC LED board	LED board	7x6W 42W	4410	2700	80	F	electronic 24V DC low voltage	YES Triac

weight 10 kg / rods 300 cm available on request

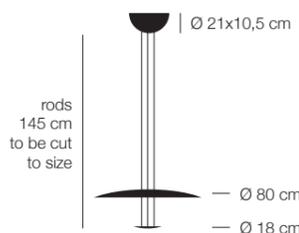


## Macchina della Luce mod. B / pendant lamp

MBLG / discs Ø 80-18 cm / gold / nickel base / brass rods  
 MBLS / discs Ø 80-18 cm / silver / nickel base / aluminium rods  
 MBLC / discs Ø 80-18 cm / copper / nickel base / brass rods

MBLG110V / discs Ø 80-18 cm / gold / nickel base / brass rods  
 MBLS110V / discs Ø 80-18 cm / silver / nickel base / aluminium rods  
 MBLC110V / discs Ø 80-18 cm / copper / nickel base / brass rods

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
220-240V	24V DC LED board	LED board	2x6W 12W	1260	2700	80	F	electronic 24V DC low voltage	YES Triac
110V	24V DC LED board	LED board	2x6W 12W	1260	2700	80	F	electronic 24V DC low voltage	YES Triac


weight 6 kg / rods 300 cm available on request

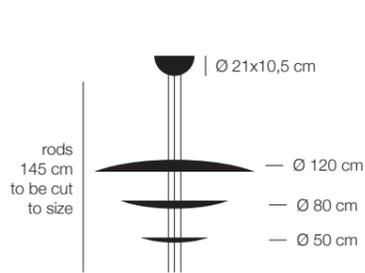

Macchina della Luce mod. C / pendant lamp	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
MCLG / discs Ø 120 (flying leaf)-80-50 cm / gold / nickel base / brass rods	220-240V	24V DC LED board	LED board	7x6W 42W	4410	2700	80	F	electronic 24V DC low voltage	YES Triac
MCLS / discs Ø 120 (flying leaf)-80-50 cm / silver / nickel base / aluminium rods										
MCLC / discs Ø 120 (flying leaf)-80-50 cm / copper / nickel base / brass rods										
MCLG110V / discs Ø 120 (flying leaf)-80-50 cm / gold / nickel base / brass rods	110V	24V DC LED board	LED board	7x6W 42W	4410	2700	80	F	electronic 24V DC low voltage	YES Triac
MCLS110V / discs Ø 120 (flying leaf)-80-50 cm / silver / nickel base / aluminium rods										
MCLC110V / discs Ø 120 (flying leaf)-80-50 cm / copper / nickel base / brass rods										


weight 13 kg / rods 300 cm available on request

p. 231

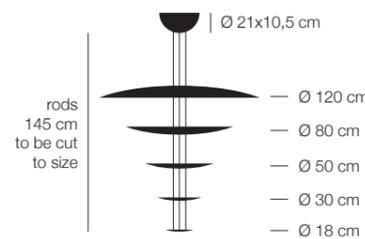


Macchina della Luce mod. D / pendant lamp	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
MDLG / discs Ø 120 (flying leaf)-80-50-30-18 cm / gold / nickel base / brass rods	220-240V	24V DC LED board	LED board	10x6W 60W	6300	2700	80	F	electronic 24V DC low voltage	YES Triac
MDLS / discs Ø 120 (flying leaf)-80-50-30-18 cm / silver / nickel base / aluminium rods										
MDLC / discs Ø 120 (flying leaf)-80-50-30-18 cm / copper / nickel base / brass rods										
MDLG110V / discs Ø 120 (flying leaf)-80-50-30-18 cm / gold / nickel base / brass rods	110V	24V DC LED board	LED board	8x6W 48W	5040	2700	80	F	electronic 24V DC low voltage	YES Triac
MDLS110V / discs Ø 120 (flying leaf)-80-50-30-18 cm / silver / nickel base / aluminium rods										
MDLC110V / discs Ø 120 (flying leaf)-80-50-30-18 cm / copper / nickel base / brass rods										

weight 16 kg / rods 300 cm available on request

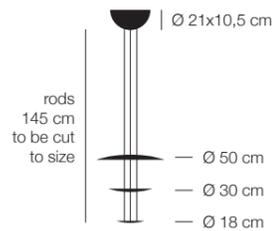

Macchina della Luce mod. E / pendant lamp	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
MELG / discs Ø 50-30-18 cm / gold / nickel base / brass rods	220-240V	24V DC LED board	LED board	4x6W 24W	2520	2700	80	F	electronic 24V DC low voltage	YES Triac
MELS / discs Ø 50-30-18 cm / silver / nickel base / aluminium rods										
MELC / discs Ø 50-30-18 cm / copper / nickel base / brass rods										
MELG110V / discs Ø 50-30-18 cm / gold / nickel base / brass rods	110V	24V DC LED board	LED board	4x6W 24W	2520	2700	80	F	electronic 24V DC low voltage	YES Triac
MELS110V / discs Ø 50-30-18 cm / silver / nickel base / aluminium rods										
MELC110V / discs Ø 50-30-18 cm / copper / nickel base / brass rods										

weight 6 kg / rods 300 cm available on request

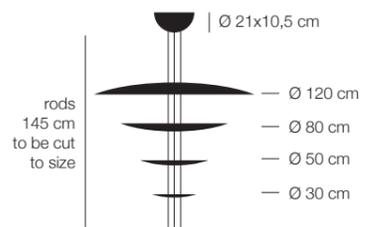


Macchina della Luce mod. F / pendant lamp	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
MFLG / discs Ø 120 (flying leaf)-80-50-30 cm / gold / nickel base / brass rods	220-240V	24V DC LED board	LED board	9x6W 54W	5670	2700	80	F	electronic 24V DC low voltage	YES Triac
MFLS / discs Ø 120 (flying leaf)-80-50-30 cm / silver / nickel base / aluminium rods										
MFLC / discs Ø 120 (flying leaf)-80-50-30 cm / copper / nickel base / brass rods										
MFLG110V / discs Ø 120 (flying leaf)-80-50-30 cm / gold / nickel base / brass rods	110V	24V DC LED board	LED board	8x6W 48W	5040	2700	80	F	electronic 24V DC low voltage	YES Triac
MFLS110V / discs Ø 120 (flying leaf)-80-50-30 cm / silver / nickel base / aluminium rods										
MFLC110V / discs Ø 120 (flying leaf)-80-50-30 cm / copper / nickel base / brass rods										

weight 15 kg / rods 300 cm available on request



p. 232

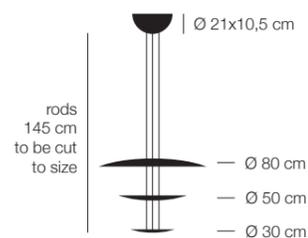**Macchina della Luce mod. I / pendant lamp**

MILG / discs Ø 80-50-30 cm / gold / nickel base / brass rods

MILS / discs Ø 80-50-30 cm / silver / nickel base / aluminium rods

MILC / discs Ø 80-50-30 cm / copper / nickel base / brass rods

MILG110V / discs Ø 80-50-30 cm / gold / nickel base / brass rods

MILS110V / discs Ø 80-50-30 cm / silver / nickel base / aluminium rods

MILC110V / discs Ø 80-50-30 cm / copper / nickel base / brass rods

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
220-240V	24V DC LED board	LED board	5x6W 30W	3150	2700	80	F	electronic 24V DC low voltage	YES Triac
110V	24V DC LED board	LED board	5x6W 30W	3150	2700	80	F	electronic 24V DC low voltage	YES Triac


weight 8 kg / rods 300 cm available on request

**Luci d'Oro**

[ *Finishes* ] // **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity. / **Rough iron** (untreated metal) is chosen by the designer specifically because of its uniqueness and its natural ageing property. The appearance of any uneven rust patches does not constitute a defect, since it is a typical sign of the ageing process, which might be considerably accelerated in conditions of high humidity or direct exposure to outdoor weathering.

[ *Note* ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / ( **\*** ) LED bulbs can be dimmed using compatible dimmers, which have been tested specifically for dimming very low loads. The manufacturers of LED bulbs are required to draw up a list of suggested dimmers for the dimming of their products, with an indication of the maximum number of bulbs dimmable with the various types of dimmer. / ( **\*\*** ) Our LEDs can be dimmed by using compatible dimmers tested specifically to dim very low loads. We suggest checking the minimum load of the dimmer before installation.

p. 237

**Malagola 27 / pendant lamp**

ML27LG / gold / black base and cable


ML27LS / silver / black base and cable

ML27LC / copper / black base and cable

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110-240V	constant current LED	COB LED	1x2W	300	2700	>80	F	constant current driver	NO

weight 0,9 kg

p. 237

**Malagola 55 / pendant lamp**


ML55LG / gold / black-cloth cable / black base

ML55LS / silver / black-cloth cable / black base

ML55LC / copper / black-cloth cable / black base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V (bulb not supplied)-240V	mains voltage LED	E27 bulb silver crowned	1x7W	600	2700	80	F	-	YES IGBT/Triac*

weight 1,7 kg




**Malagola 110 / pendant lamp**

- ML110LG / gold / black-cloth cable / black base
- ML110LS / silver / black-cloth cable / black base
- ML110LC / copper / black-cloth cable / black base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V (bulbs not supplied)-240V	mains voltage LED	E27 bulb silver crowned	3x7W 21W	1800	2700	80	F	-	YES IGBT/Triac*

weight 4,5 kg

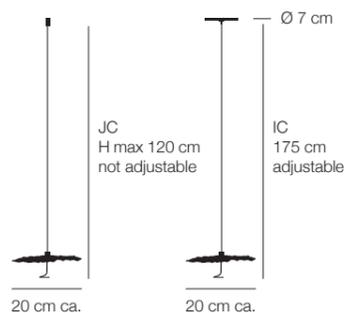


**Gold Moon JC / IC / pendant lamp**

- GMJCLVO / mod. JC / nickel jack connection / black wire / black/gold wrap shade / copper curl
- GMICLVO / mod. IC / nickel plate with tensioner / black wire / black/gold wrap shade / copper curl

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
-	constant voltage 24V LED	LED Jack/interch. interch. LED	1x1W	143	2700	>80	G	not included available on request	-

installation hole mod. JC Ø 1,3 cm  
installation hole mod. IC Ø 5,5 cm

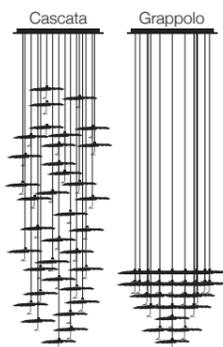


**Gold Moon Chandelier / pendant lamp**

- Cascata**
- CGM20CLVO / satin steel base / 20x black/gold wrap shades / copper curls / nickel jack / black wires
  - CGM25CLVO / satin steel base / 25x black/gold wrap shades / copper curls / nickel jack / black wires
  - CGM35CLVO / satin steel base / 35x black/gold wrap shades / copper curls / nickel jack / black wires
- Grappolo**
- CGM20CLVOG / satin steel base / 20x black/gold wrap shades / copper curls / nickel jack / black wires
  - CGM25CLVOG / satin steel base / 25x black/gold wrap shades / copper curls / nickel jack / black wires
  - CGM35CLVOG / satin steel base / 35x black/gold wrap shades / copper curls / nickel jack / black wires

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V or 240V	constant voltage 24V LED	LED Jack/interch.	20x1W 20W 25x1W 25W 35x1W 35W	2860 3575 5005	2700	>80	G	constant voltage driver	YES IGBT/Triac**
110V or 240V	constant voltage 24V LED	LED Jack/interch.	20x1W 20W 25x1W 25W 35x1W 35W	2860 3575 5005	2700	>80	G	constant voltage driver	YES IGBT/Triac**

Further base dimensions and finish (ie. white/silver - black/silver shades) available.

base Ø 78 cm / shades Ø 20 cm ca. / H max 300 cm not adjustable

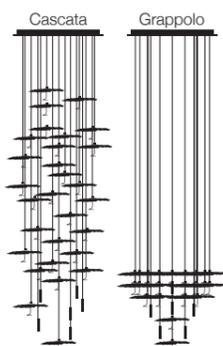

**Gold Moon Chandelier with Spot Light / pendant lamp**

- Cascata**
- CGMSPL20CLVO / satin steel base / 17x GM / 3x SPL / copper curls / nickel jack / black wires
  - CGMSPL25CLVO / satin steel base / 22x GM / 3x SPL / copper curls / nickel jack / black wires
  - CGMSPL35CLVO / satin steel base / 29x GM / 6x SPL / copper curls / nickel jack / black wires
- Grappolo**
- CGMSPL20CLVOG / satin steel base / 17x GM / 3x SPL / copper curls / nickel jack / black wires
  - CGMSPL25CLVOG / satin steel base / 22x GM / 3x SPL / copper curls / nickel jack / black wires
  - CGMSPL35CLVOG / satin steel base / 29x GM / 6x SPL / copper curls / nickel jack / black wires


voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V or 240V	constant voltage 24V LED	LED Jack/interch.	20x1W 20W 25x1W 25W 35x1W 35W	2860 3575 5005	2700	>80	G	constant voltage driver	YES IGBT/Triac**
110V or 240V	constant voltage 24V LED	LED Jack/interch.	20x1W 20W 25x1W 25W 35x1W 35W	2860 3575 5005	2700	>80	G	constant voltage driver	YES IGBT/Triac**

GM= black/gold shades Ø 20 cm / SPL= black/brass Spot Light

Further base dimensions and finish (ie. white/silver - black/silver shades) available.

base Ø 78 cm / shades Ø 20 cm ca. / H max 300 cm not adjustable

p. 248

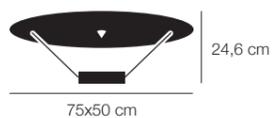**DiscO / ceiling lamp**

DSOLG / gold / polished aluminium and nickel details  
 DSOLS / silver / polished aluminium and nickel details  
 DSOLC / copper / polished aluminium and nickel details  
 DSOLW / white / polished aluminium and nickel details

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
240V (available 110V DALI dimmable)	constant current LED	COB LED	1x15W	2187	2700	80	D	constant current LED driver	YES Triac


p. 249

**Luna W / wall lamp**

LNW30G / gold / copper stick / brass flex  
 LNW30S / silver / copper stick / brass flex  
 LNW30C / copper / copper stick / brass flex

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V or 240V	constant current LED 350 mA	interch. LED	2x1W 2W	280	2700	85	D	constant current driver	NO

p. 250

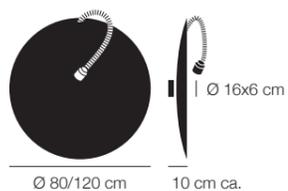**Luna Piena 80 / 120 / ceiling or wall lamp**


LP80LG / Luna Piena 80 / gold flying leaf (exterior grey matt) / brass flex / white base  
 LP80LS / Luna Piena 80 / silver flying leaf (exterior grey matt) / nickel flex / white base  
 LP80LC / Luna Piena 80 / copper flying leaf (exterior grey matt) / brass flex / white base  
 LP120LG / Luna Piena 120 / gold flying leaf (exterior grey matt) / brass flex / white base  
 LP120LS / Luna Piena 120 / silver flying leaf (exterior grey matt) / nickel flex / white base  
 LP120LC / Luna Piena 120 / copper flying leaf (exterior grey matt) / brass flex / white base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
220-240V (110V available on request)	low voltage LED 12V	GU5.3	1x7,5W	630	3000	90	F	low voltage driver	YES IGBT/Triac

H recommended distance  
from lamp to disc 25 cm ca

Ø 80: flex Ø 1,3x50 cm  
 Ø 120: flex Ø 1,5x80 cm


p. 253

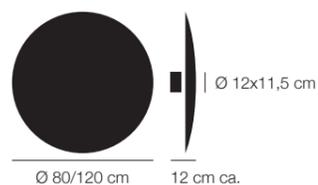**Francesca 80 / 120 / wall lamp**

FR8230LWG / Francesca 80 / white/gold back side / white base  
 FR8230LG / Francesca 80 / gold / gold base  
 FR8230LS / Francesca 80 / silver / silver base  
 FR8230LC / Francesca 80 / copper / copper base  
 FR12230LWG / Francesca 120 / white/gold back side / white base  
 FR12230LG / Francesca 120 / gold / gold base  
 FR12230LS / Francesca 120 / silver / silver base  
 FR12230LC / Francesca 120 / copper / copper base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V (bulbs not supplied)-240V	mains voltage LED	E27 LED bulb	8x8W 64W	7200	2700	>80	E	-	YES IGBT/Triac*

p. 254

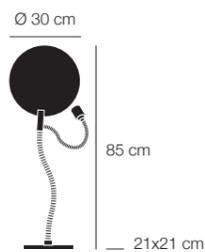


**Luce d'Oro T / table lamp**

- LOLG / gold / brass flex / rough iron base / black switch and cable
- LOLS / silver / nickel flex / rough iron base / black switch and cable
- LOLC / copper / brass flex / rough iron base / black switch and cable

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110-240V	low voltage LED 12V	GU4 bulb	1x3,5W	200	2700	80	G	low voltage plug driver	NO on/off switch included

p. 255

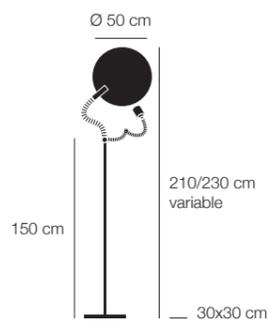

**Luce d'Oro F / standing lamp**

- LOFLG / gold / brass flex / rough iron base and structure / black cable and dimmer
- LOFLS / silver / nickel flex / rough iron base and structure / black cable and dimmer
- LOFLC / copper / brass flex / rough iron base and structure / black cable and dimmer

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110-240V	low voltage LED 12V	GU5.3 bulb	1x7,5W	630	3000	90	F	low voltage plug driver	included (memory last step)

p. 256




**Luna / table candle holder**

- LNG / gold / rough iron base
- LNS / silver / rough iron base
- LNC / copper / rough iron base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
-	candle (included)	-	-	-	-	-	-	-	-

p. 257



**Gemma / table candle holder**

- GMG / gold / rough iron structure
- GMS / disc silver / rough iron structure
- GMC / copper / rough iron structure

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
-	candle (included)	-	-	-	-	-	-	-	-

**Colonna** / standing lamp

CNLG / gold interior (flying leaf) / rough iron coloumn / black dimmer

CNLS / silver interior (flying leaf) / rough iron coloumn / black dimmer

CNLC / copper interior (flying leaf) / rough iron coloumn / black dimmer

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110V (bulb not supplied)-240V	mains voltage LED	E27 bulb	1x17W	1900	2700	>80	E	-	included (memory last step)

**Pepita 65** / recessed lamp for plasterboard ceiling

P65 / white / gold / transparent cover

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
-	constant voltage 24V LED	interch. LED board	1x1W	160	2700	90	F	not included available on request	-

**Pepita 102** / recessed lamp for plasterboard ceiling/wall

P102 / white / gold

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
-	constant voltage 24V LED	interch. LED board	1x1W	160	2700	90	F	not included available on request	-


Pepita 65  
internal Ø 5,9 cm / external Ø 8,9 cm /  
depth 5,6 cm / installation hole Ø 6,5 cm

Pepita 102  
internal Ø 9,7 cm / external Ø 11 cm /  
depth 5,5 cm / installation hole Ø 10,2 cm

**Turciù**

[ *Finishes* ] // **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity. / **Rough iron** (untreated metal) is chosen by the designer specifically because of its uniqueness and its natural ageing property. The appearance of any uneven rust patches does not constitute a defect, since it is a typical sign of the ageing process, which might be considerably accelerated in conditions of high humidity or direct exposure to outdoor weathering.

[ *Note* ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / (\*) LED bulbs can be dimmed using compatible dimmers, which have been tested specifically for dimming very low loads. The manufacturers of LED bulbs are required to draw up a list of suggested dimmers for the dimming of their products, with an indication of the maximum number of bulbs dimmable with the various types of dimmer.

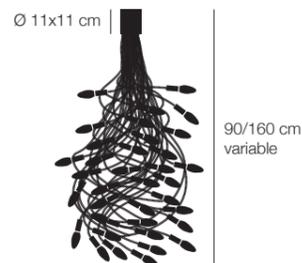**Turciù 36** / ceiling/pendant lamp

TRS36LNC / nickel flex (nickel lampholder) / satin nickel base

TRS36LBR / brass flex (nickel lampholder) / satin nickel base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V (bulbs not supplied)-240V	mains voltage LED	E14 bulb	36x4W 144W	12960	2700	>80	F	-	YES IGBT/Triac*

flex Ø 0,85 cm:  
7x75 cm / 10x100 cm / 9x125 cm / 10x150 cm  
weight 20 kg

p. 267



90/160 cm  
variable

**Turciù 21** / ceiling/pendant lamp

TRS21LNC / nickel flex (nickel lampholder) / satin nickel base  
 TRS21LBR / brass flex (nickel lampholder) / satin nickel base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V (bulbs not supplied)-240V	mains voltage LED	E14 bulb	21x4W 84W	7560	2700	>80	F	-	YES IGBT/Triac*

flex Ø 0,85 cm: 5x100 cm / 16x150 cm  
 weight 11 kg

p. 267



90/160 cm  
variable


**Turciù 16** / ceiling/pendant lamp

TRS16LNC / nickel flex (nickel lampholder) / satin nickel base  
 TRS16LBR / brass flex (nickel lampholder) / satin nickel base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V (bulbs not supplied)-240V	mains voltage LED	E14 bulb	16x4W 64W	5760	2700	>80	F	-	YES IGBT/Triac*

flex Ø 0,85 cm: 16x150 cm  
 weight 9 kg

p. 267

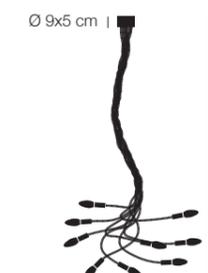

90/160 cm  
variable

**Turciù 9** / ceiling/pendant lamp

TR9LNC / nickel flex (nickel lampholder) / satin nickel base  
 TR9LBR / brass flex (nickel lampholder) / satin nickel base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V (bulbs not supplied)-240V	mains voltage LED	E14 bulb	9x4W 36W	3240	2700	>80	F	-	YES IGBT/Triac*

flex Ø 0,85 cm: 9x150 cm  
 weight 5 kg

p. 268



50/60 cm  
variable  
 Ø 9x5 cm


**Turciù 9** / wall lamp

TR9LNC / nickel flex (nickel lampholder) / satin nickel base  
 TR9LBR / brass flex (nickel lampholder) / satin nickel base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V (bulbs not supplied)-240V	mains voltage LED	E14 bulb	9x4W 36W	3240	2700	>80	F	-	YES IGBT/Triac*

flex Ø 0,85 cm: 9x75 cm

p. 269



**Turciù 5 / wall lamp**

TR5LNC / nickel flex (nickel lampholder) / nickel base  
 TR5LBR / brass flex (nickel lampholder) / nickel base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V (bulbs not supplied)-240V	mains voltage LED	E14 bulb	5x4W 20W	1800	2700	>80	F	-	YES IGBT/Triac*

flex Ø 0,85 cm: 5x75 cm

p. 270



**Turciù 3 / 2 / wall lamp**

TR3LNC / Turciù 3 / nickel flex (nickel lampholder) / nickel base  
 TR3LBR / Turciù 3 / brass flex (nickel lampholder) / nickel base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V (bulbs not supplied)-240V	mains voltage LED	E14 bulb	3x4W 12W	1080	2700	>80	F	-	YES IGBT/Triac*




TR2LNC / Turciù 2 / nickel flex (nickel lampholder) / nickel base  
 TR2LBR / Turciù 2 / brass flex (nickel lampholder) / nickel base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110V (bulbs not supplied)-240V	mains voltage LED	E14 bulb	2x4W 8W	720	2700	>80	F	-	YES IGBT/Triac*

flex Ø 1,3 cm: 3/2x50 cm  
 on request available with flex Ø 0,85 cm

p. 271

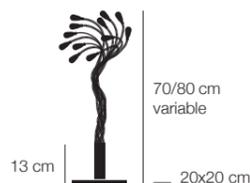


**Bonsai / table lamp**

BNLBR / LED / brass flex (nickel lampholder) / iron base / black cable and dimmer

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
240V (110V available on request / bulbs not supplied)	mains voltage LED	E14 bulb	12x2,7W 32,4W	1800	2700	>80	G	-	included

flex Ø 0,6 cm: 12x60 cm

p. 272

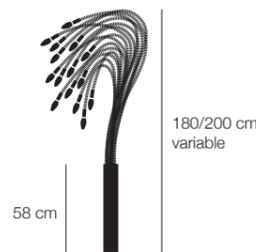


**Sottovento 15 / standing lamp**

SVLNC / nickel flex (nickel lampholder) / iron structure / black cable and dimmer  
 SVLBR / brass flex (nickel lampholder) / iron structure / black cable and dimmer

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
240V (110V available on request / bulbs not supplied)	mains voltage LED	E14 bulb	15x4W 60W	5400	2700	>80	F	-	included

base 40x40 cm / flex Ø 1,2: 15x150 cm

p. 273

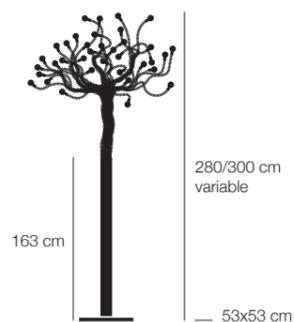

## Albero della Luce / standing lamp

ALLBR / brass flex (nickel lampholder) / iron structure / black cable

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
240V (110V available on request / bulbs not supplied)	mains voltage LED	E14 bulb	36x4W 144W	12960	2700	80	F	-	wireless (remote control included)


flex Ø 0,85 cm: 36x150 cm

## Oggetti Senza Tempo

[ Finishes ] // **Nickel coating** (metal plating process) is chosen by the designer for its elegant and warm finish. To prevent any natural oxidation process, it requires regular cleaning. In alternative to nickel coating, customized finishes (i.e. chrome plating) can be provided upon request. / **Brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity. / **Copper** is a very malleable and ductile metal, chosen for its high thermal and electrical conductivity, as well as for its typical reddish-orange colour. We use it untreated, therefore it may oxidise with time, forming a green patina. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity.

[ Note ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / ( **\*** ) LED bulbs can be dimmed using compatible dimmers, which have been tested specifically for dimming very low loads. The manufacturers of LED bulbs are required to draw up a list of suggested dimmers for the dimming of their products, with an indication of the maximum number of bulbs dimmable with the various types of dimmer. / ( **\*\*** ) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard. / ( **\*\*\*** ) Our LEDs can be dimmed by using compatible dimmers tested specifically to dim very low loads. We suggest checking the minimum load of the dimmer before installation.

p. 277



## Miracolo / table candle holder

MRBR / brass flex and details

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
-	candle (included)	-	-	-	-	-	-	-	-

p. 278




## CicloItalia T / table lamp

CIBR / brass base and structure / black dimmer / black wire

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110-240V	constant current LED 500 mA	COB LED	1x5W	600	2700	80	F	plug driver**	included

p. 279

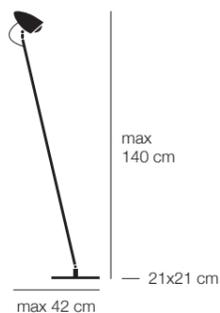


**CicloItalia F / standing lamp**

CIFBR / black base / brass structure / black wire

CIFBRM / black base / brass structure / black dimmer and wire

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
220-240V	constant current LED 350 mA	COB LED	1x5W	600	2700	80	F	plug driver (EU plug only)	included touch (memory 0%)
110-240V								plug driver**	included (memory last step)

p. 283




**Lola T / table lamp**

LBR / brass structure / copper stick / black wire / black dimmer

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110-240V	constant current LED 350 mA	interch. LED	3x1W 3W	420	2700	85	D	plug driver**	included (memory last step)

p. 285

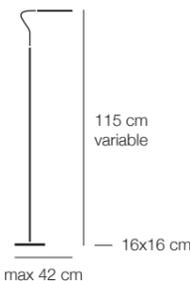


**Lola F / standing lamp**

LFBR / brass structure / copper stick / black wire

LFBRM / brass structure / copper stick / black dimmer and wire

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
220-240V	constant current LED 350 mA	interch. LED	3x1W 3W	420	2700	85	D	plug driver (EU plug only)	included touch (memory 0%)
110-240V								plug driver**	included (memory last step)

p. 286




**Luce che dipinge / wall lamp**

LD5L / white canvas / black pipe / black wrap screen

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
240V (110V available on request)	12V DC LED bulb	G4 bulb	1x max 1W	69	2700	80	G	low voltage driver	NO

p. 288



**Herem T / USB table lamp**

HRT / brass flex and shade

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
HRT / brass flex and shade	110-240V	constant voltage LED 5V	LED board	1x2,8W	300	2700	>90	D	USB plug driver 5V (EU plug only)	included touch-less

p. 289




**Nike / table lamp**

NKL / white ceramic chalk statue / nickel flex / glass lens / blue wire / black dimmer

NKLPL / white ceramic chalk statue / nickel flex / glass lens / blue wire / black dimmer

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
NKL / white ceramic chalk statue / nickel flex / glass lens / blue wire / black dimmer	220-240V (EU plug only)	constant current LED 350 mA	interch. LED	1x1W	140	2700	85	D	constant current plug driver (EU plug only)	included (memory 100%)
NKLPL / white ceramic chalk statue / nickel flex / glass lens / blue wire / black dimmer	110-240V (all other plugs)	constant current LED 350 mA	interch. LED	1x1W	140	2700	85	D	constant current plug driver (all other plugs)**	included (memory last step)

p. 290

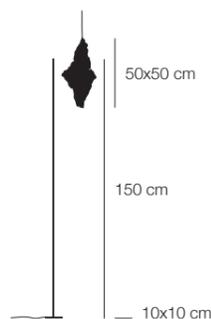

**Shadow / standing lamp with net**

SW / black structure / brass net / black wire and dimmer

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
SW / black structure / brass net / black wire and dimmer	110-240V	constant current LED 350 mA	interch. LED	1x1W	140	2700	85	D	constant current plug driver**	included (memory last step)

p. 293



**EC 301 / wall or ceiling lamp**


EC301JB / black structure and base / brass joint and lens holder / glass lens

EC301JW / white structure and base / brass joint and lens holder / glass lens

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
EC301JB / black structure and base / brass joint and lens holder / glass lens EC301JW / white structure and base / brass joint and lens holder / glass lens	220-240V	constant current LED 500 mA	COB LED	1x5W 5W	600	2700	600	F	constant current driver	YES IGBT/Triac***



p. 295

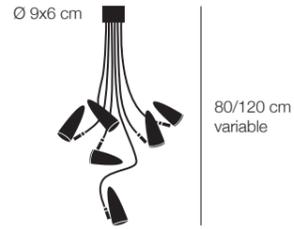**CicloItalia Flex C6 / ceiling/pendant lamp**

CIC6B / black base and spotlights / brass flex and details / glass lens

CIC6W / white base and spotlights / brass flex and details / glass lens

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
220-240V (110V available on request)	low voltage LED 12V	GU 5.3 bulb	6x7,5W 45W	3780	3000	90	F	low voltage LED transformer	YES Triac*

flex: 5x Ø1,3x50 cm; 1x Ø1,2x100 cm

p. 296

**CicloItalia Flex W1 / wall lamp**

CIW1B / black base and spotlight / brass flex and details / glass lens / with on/off

CIW1W / white base and spotlight / brass flex and details / glass lens / with on/off

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
220-240V (110V available on request)	low voltage LED 12V	GU 5.3 bulb	1x7,5W	630	3000	90	F	low voltage LED transformer	NO on/off switch

base: 17x5x4 cm ca.

p. 297

**CicloItalia Flex W2 / wall lamp**

CIW2B / black base and spotlights / brass flex and details / glass lens

CIW2W / white base and spotlights / brass flex and details / glass lens

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
220-240V (110V available on request)	low voltage LED 12V	GU 5.3 bulb	2x7,5W 15W	1260	3000	90	F	low voltage LED transformer	YES Triac*

base: 17x5x4 cm ca.

p. 298


**CicloItalia Flex F3 / standing lamp**

CIF3BM / black rod/base/spotlights / brass flex and details / glass lens

CIF3WM / white rod/base/spotlights / brass flex and details / glass lens

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110-240V	low voltage LED 12V	GU 5.3 bulb	3x7,5W 22,5W	1890	3000	90	F	plug driver**	included (memory last step)

p. 301




U. W / wall lamp

UWJB / black base and shade / brass joint  
UWJW / white base and shade / brass joint

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
220-240V (110V available on request)	constant current LED 270 mA	COB LED	1x9W	1324	2700	80	E	constant current driver	YES IGBT/Triac***

p. 303

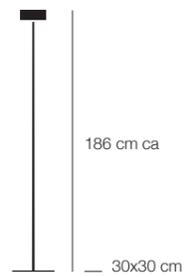

U. F Up / standing lamp

UFUB / black rod/base/shade (internally gold) / steel silhouette with magnet  
UFUW / white rod/base/shade (internally gold) / steel silhouette with magnet

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110-240V	constant current LED 500 mA	COB LED	1x17W	2500	2700	80	D	plug driver**	included (memory last step)

p. 305




U. W Flex / wall lamp

UWFB / black base and shade / brass flex  
UWFW / white base and shade / brass flex

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
220-240V (110V available on request)	constant current LED 450 mA	COB LED	1x15W	2200	2700	80	D	constant current driver	YES Triac***

base:16x3x6 cm

p. 307

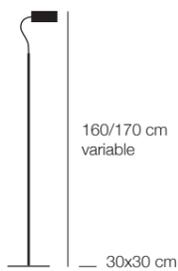

U. F Flex / standing lamp

UFFB / black base and shade / brass flex  
UFFW / white base and shade / brass flex

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110-240V	constant current LED 450 mA	COB LED	1x15W	2200	2700	80	D	plug driver**	included (memory last step)

p. 309




Vi. W / wall lamp

VWVB / black structure and shade / brass details  
 VIWW / white structure and shade / brass details

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
220-240V (110V available on request)	constant current LED 450 mA	COB LED	1x15W	2200	2700	80	D	constant current driver	YES Triac***

p. 311

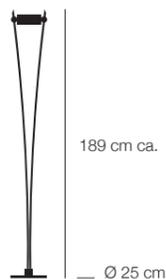

Vi. F / standing lamp

VIFB / black structure and shade / brass details  
 VIFW / white structure and shade / brass details


voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110-240V	constant current LED 450 mA	COB LED	1x15W	2200	2700	80	D	plug driver**	included (memory last step)

## Other Smiths

[ Finishes ] // **Brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. We use it untreated, therefore it may oxidise with time. Regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity.

[ Note ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / ( \* ) The plug driver 110-240V is supplied with the electrical plug suitable for the market of reference only. Please specify in stage of order if the destination of the product differs from your standard.


p. 315

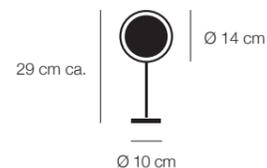

Talismano / table lamp

TLST / brass/iridescent glass / black dimmer and wire

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110-240V	constant voltage 24V LED	LED flexible board	6W	2187	2700	>80	D	plug driver*	included (memory last step)

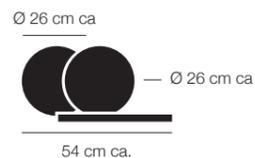


## Alchemie T / table lamp

AHT / brass disc / alabaster diffuser / Medea limestone base

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
110-240V	constant voltage 24V LED	low voltage LED strip	12W	1300	3000	>95	G	plug driver*	included

Medousê  
(outdoor)

[ Note ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). /  
 ( \* ) Mains voltage LED modules and COB LED are dimmable using IGBT (trailing edge) dimmers designed specifically for LED sources. Their dimming is extremely delicate: incompatible dimmers may cause irreparable damage to the LED. Some dimmers on the market have a NO button (Normally Open) or are specific connector socket-mounted or recessed. They are generally inserted into junction boxes; their limited thickness facilitates the installer's task and makes the dimmer fit for installation even in shallow boxes. Dimmers with an integrated radio dimmer for both manual (NO button) and wireless control are also available. It is important to note that during adjustment the dimming appears less precise, with some flickering. Furthermore some types of dimmer, even if they have been recommended by the manufacturers themselves, have visible flickering (almost essentially down to a minimum) depending on the mains and on the type of interference present. The problem can be solved by increasing the minimum value setting of the potentiometer on the dimmer. /  
 ( \*\* ) IP specifics: LED module IP64; IP average rate of the lamp 44.



## Medousê W / wall lamp

MD3P / green glass / brass rod  
 MD3PTR / transparent glass / brass rod

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V or 240V	mains voltage LED**	LED module IP64	1x17W	1650	2700	80	A+	-	YES*



## Medousê F / floor lamp

MD3 / Ø 30 cm / green glass / aluminium details / plug cable (code MDCV) not included  
 MD3TR / Ø 30 cm / transparent glass / brass details / plug cable (code MDCV) not included  
 MD5 / Ø 50 cm / green glass / aluminium details / plug cable (code MDCV) not included  
 MD5TR / Ø 50 cm / transparent glass / brass details / plug cable (code MDCV) not included

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
110V or 240V	mains voltage LED**	LED module IP64	1x25W	2875	2700	80	E	-	YES*


## More (outdoor)

[ Finishes ] // **Zinc plated metal** is the material of the stems of the More collection. They are suitable for outdoor installation, but they are not immersion proof.

[ Cables ] // ( **s** ) suspension cable. / ( **el** ) electrical cable.

[ Note ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / ( \* ) IP specifics: lampholder IP65 (not protected against immersion); wires and connectors IP68; drivers IP67; IP average rate of the lamp 44.

p. 334

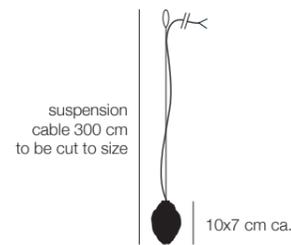

**More** / pendant lamp / driver and accessories not incl. (see pages 112-117)

MRS / transparent glass / steel cable<sup>(s)</sup> / grey-transparent cable<sup>(el)</sup>


MRSA / amber glass / steel cable<sup>(s)</sup> / grey-transparent cable<sup>(el)</sup>

MRSGR / green glass / steel cable<sup>(s)</sup> / grey-transparent cable<sup>(el)</sup>

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
-	12V DC LED bulb	G4 bulb (IP65 lampholder)*	1x max 1W	69	2700	80	G	not included available on request	-

weight 1 kg

p. 337



**More 0** / floor lamp / driver and accessories not incl. (see pages 112-117)


MR0 / transparent glass / grey-transparent cable 300 cm

MR0A / amber glass / grey-transparent cable 300 cm

MR0GR / green glass / grey-transparent cable 300 cm

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
-	12V DC LED bulb	G4 bulb (IP65 lampholder)*	1x max 1W	69	2700	80	G	not included available on request	-

p. 338

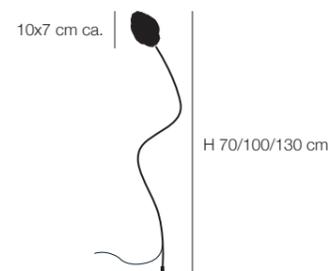

**More F** / standing lamp / driver and accessories not incl. (see pages 112-117)

MR70 / H 70 cm / metal stem / transparent glass / grey-transparent cable 210 cm

MR70A / H 70 cm / metal stem / amber glass / grey-transparent cable 210 cm

MR70GR / H 70 cm / metal stem / green glass / grey-transparent cable 210 cm

MR100 / H 100 cm / metal stem / transparent glass / grey-transparent cable 170 cm

MR100A / H 100 cm / metal stem / amber glass / grey-transparent cable 170 cm

MR100GR / H 100 cm / metal stem / green glass / grey-transparent cable 170 cm

MR130 / H 130 cm / metal stem / transparent glass / grey-transparent cable 150 cm

MR130A / H 130 cm / metal stem / amber glass / grey-transparent cable 150 cm

MR130GR / H 130 cm / metal stem / green glass / grey-transparent cable 150 cm


voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
-	12V DC LED bulb	G4 bulb (IP65 lampholder)*	1x max 1W	69	2700	80	G	not included available on request	-

# Sypha (outdoor)

[ Finishes ] // **Stems** - the stems of the Sypha collection are made of brass (Syphaduepassi) or black coloured iron (Syphasera and Syphasfera).

[ Note ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). /  
(\* ) IP specifics: lampholder IP65 (not protected against immersion); wires and connectors IP68; drivers IP67; IP average rate of the lamp 44.

p. 343

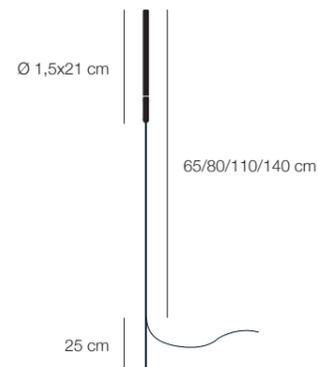


**Syphasera** / standing lamp / driver and accessories not incl. (see pages 112-117)

SYS65 / H 65 cm / black stem / brass details / opaline glass / grey-transparent cable 255 cm
SYS80 / H 80 cm / black stem / brass details / opaline glass / grey-transparent cable 240 cm
SYS110 / H 110 cm / black stem / brass details / opaline glass / grey-transparent cable 210 cm
SYS140 / H 140 cm / black stem / brass details / opaline glass / grey-transparent cable 180 cm

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
-	12V DC LED bulb	G4 bulb (IP65 lampholder)*	1x max 1W	67	2700	80	F	not included available on request	-

p. 346

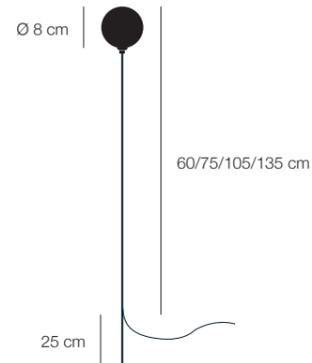

**Syphasfera** / standing lamp / driver and accessories not incl. (see pages 112-117)

SYF60 / H 60 cm / black stem / brass details / transparent glass / grey-transparent cable 255 cm
SYF60I / H 60 cm / black stem / brass details / irreg. transp. glass / grey-transparent cable 255 cm
SYF75 / H 75 cm / black stem / brass details / transparent glass / grey-transparent cable 240 cm
SYF75I / H 75 cm / black stem / brass details / irreg. transp. glass / grey-transparent cable 240 cm
SYF105 / H 105 cm / black stem / brass details / transparent glass / grey-transparent cable 210 cm
SYF105I / H 105 cm / black stem / brass details / irreg. transp. glass / grey-transparent cable 210 cm
SYF135 / H 135 cm / black stem / brass details / transparent glass / grey-transparent cable 180 cm
SYF135I / H 135 cm / black stem / brass details / irreg. transp. glass / grey-transparent cable 180 cm

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
-	12V DC LED bulb	G4 bulb (IP65 lampholder)*	1x max 1W	69	2700	80	G	not included available on request	-

p. 349



**Syphaduepassi** / standing lamp / driver and accessories not incl. (see pages 112-117)

SYD45 / H 45 cm / brass stem and details / grey-transparent cable 225 cm
SYD75 / H 75 cm / brass stem and details / grey-transparent cable 195 cm

voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimming
-	12V DC LED bulb	G4 bulb (IP65 lampholder)*	1x max 1W	67	2700	80	F	not included available on request	-


## Fil de Fer (outdoor)

[ Finishes ] // **Rough iron** (untreated metal) is chosen by the designer specifically because of its uniqueness and its natural ageing property. The appearance of any uneven rust patches does not constitute a defect, since it is a typical sign of the ageing process, which might be considerably accelerated in conditions of high humidity or direct exposure to outdoor weathering.

[ Cables ] // ( **s** ) suspension cable. / ( **el** ) electrical cable.

[ Note ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website). / ( \* ) The drivers for the dimmable version of our outdoor products are larger than their not-dimmable standards. They are available on request with custom sized bases and boxes (see our website for further references). / ( \*\* ) IP specifics: lampholder IP65 (not protected against immersion); wires and connectors IP68; drivers IP67; IP average rate of the lamp 44.

p. 353

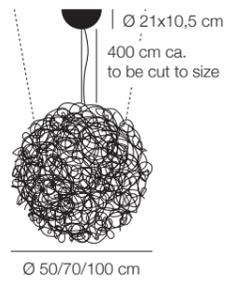


### Fil de Fer / outdoor pendant lamp

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
F5SIPL / Ø 50 cm / aluminium / steel cables <sup>(s)</sup> / metal braided cable <sup>(el)</sup> / chrome base	110V or 240V	12V DC LED bulb	G4 bulbs (IP65 lampholder)**	8x max 1W 8W	552	2700	80	G	electronic 12V DC IP67	NO
F7SIPL / Ø 70 cm / aluminium / steel cables <sup>(s)</sup> / metal braided cable <sup>(el)</sup> / chrome base				16x max 1W 16W	1104					
F10SIPL / Ø 100 cm / aluminium / steel cables <sup>(s)</sup> / metal braided cable <sup>(el)</sup> / chrome base				20x max 1W 20W	1380					

weight: Ø 50 8,5 kg / Ø 70 13 kg / Ø 100 18 kg

p. 354




### Fil de Fer F / outdoor floor lamp

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
F5IPL / Ø 50 cm / aluminium / metal braided cable / black box and plug cable	240V (110V available on request)	12V DC LED bulb	G4 bulbs (IP65 lampholder)**	8x max 1W 8W	552	2700	80	G	electronic 12V DC IP67	NO
F7IPL / Ø 70 cm / aluminium / metal braided cable / black box and plug cable				16x max 1W 16W	1104					
F10IPL / Ø 100 cm / aluminium / metal braided cable / black box and plug cable				20x max 1W 20W	1380					

cable 12V 450 cm / cable 230V (EU or CH) 200 cm

p. 359

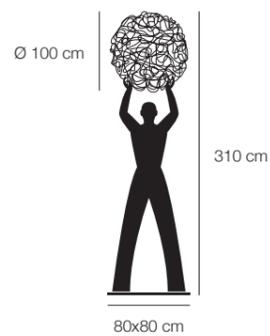

### Uomo della Luce XXL / outdoor standing lamp

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
UIPL / rough iron structure / aluminium sphere / black cable, box and plug cable	240V (110V av. on request)	12V DC LED bulb	G4 bulbs (IP65 lampholder)**	20x max 1W 20W	1380	2700	80	G	electronic 12V DC IP67	NO

cable 12V 350 cm / cable 230V (EU or CH) 200 cm




## Limited edition

[ Finishes ] // **Brass** (an alloy of copper and zinc) is a very elegant finish, yellow-gold in colour, with an excellent corrosion resistance. It may oxidise, therefore regular cleaning helps preserving its original appearance and slow down the ageing process, which might be anyway accelerated by the weather, frequent handling or conditions of high humidity.

[ Note ] // The **lumen** value refers to the rated lumen output of the light source; for the lamp's output please refer to our bim files (see website).

p. 365



Trenta / battery table lamp / plug driver 110-240V with EU plug

TRENTA / glass bulb / brass-coated cover / 1x1W LED / on/off included

	voltage	source	type	watt	lumen	K	CRI	en. class	driver/transformer	dimmer
TRENTA / glass bulb / brass-coated cover / 1x1W LED / on/off included	Li-ION 3,7V 1180 mA/h	constant voltage	LED	1x1W	100	2700	80	A+	input 110/240V output 5V@1,2 A (EU plug only)	NO on/off switch included

TECHNICAL INFORMATION



## MAINS VOLTAGE LED

The LED modules and COB LED we supply in the Lederam (exception made for Lederam F0) and Medousê collection can be connected directly to the mains voltage because they do not require any driver (other than the one already mounted on the module). Compared to traditional light sources, mains voltage LED modules are more sensitive to any interference in the electricity mains, including voltage fluctuation and harmonic distortion, because they have a faster response to changes in voltage.

This means that consequently to this variations occasional flickering or functioning anomaly may occur, but since not depending on the product, they cannot be considered a flaw or defect.

Further than by problems on the line voltage, fluctuations and harmonics may be produced by variable power loads, as those caused by many types of motors and electronic devices. In case of anomalies we suggest to check the electrical system to apply protective modules reducing overvoltage at the connection terminals of electronic components. By means of this modules / filters, any residual voltage is then reduced to an appropriate protective level in relation to the discharge current.

### Dimming


Mains voltage LED modules and COB LED are dimmable using IGBT (trailing edge) dimmers designed specifically for LED sources. Their dimming is extremely delicate: incompatible dimmers may cause irreparable damage to the LED.

Some dimmers on the market have a NO button (Normally Open button) or they are specific connector socket-mounted or recessed. They are generally inserted into junction boxes; their limited thickness facilitates the installer's task and makes the dimmer fit for installation even in shallow boxes.

Dimmers with an integrated radio dimmer for both manual (NO button) and wireless control are also available.


It is important to note that during adjustment (for instance with a cord dimmer) the dimming appears less precise, with some flickering. Furthermore some types of dimmer, even if they have been recommended by the manufacturers themselves, have visible flickering (almost essentially down to a minimum) depending on the mains and on the type of interference present. The problem can be solved by increasing the minimum value setting of the potentiometer on the dimmer.

LED module

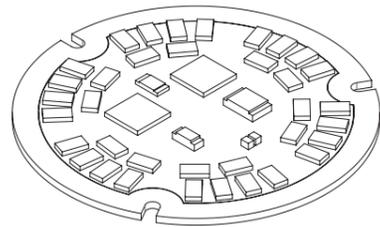


17W  
28W

LED module  
(Medousê)

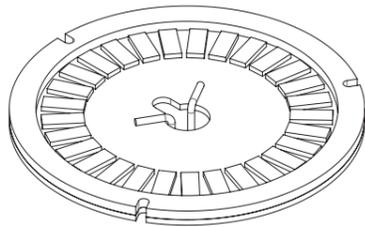

17W  
29W


COB LED




15W  
30W




### NO (Normally Open) Button

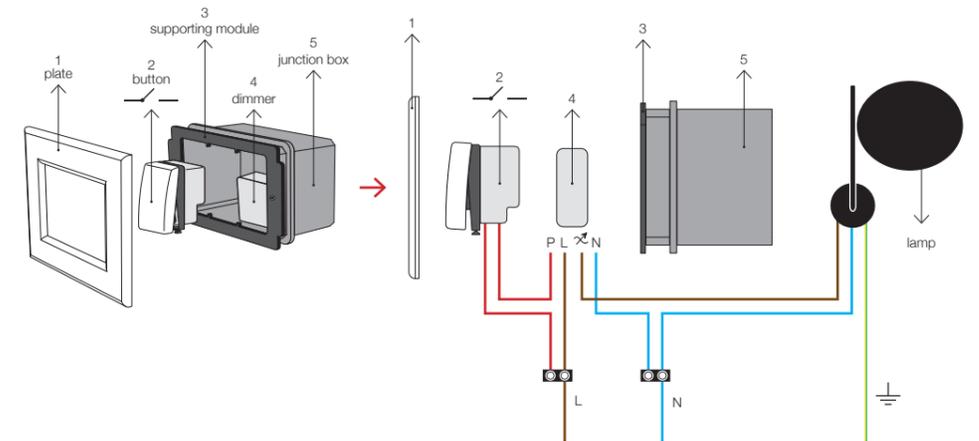

### Socket-mounted or recessed

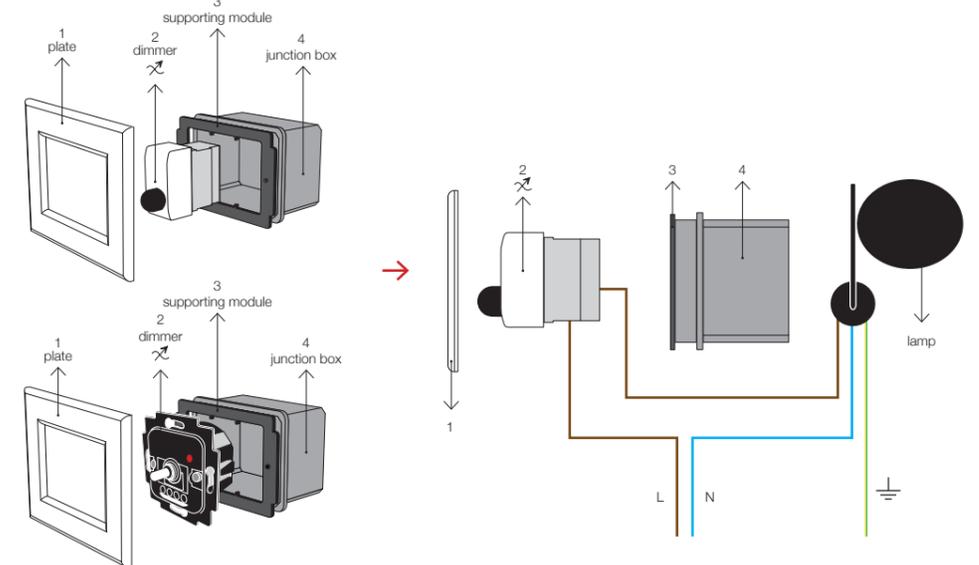


### Wireless

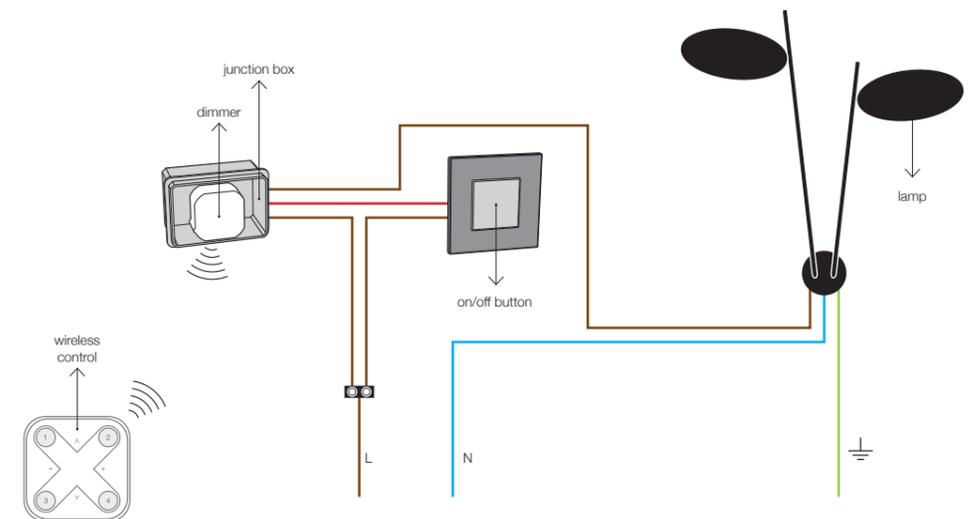



**LEDERAM: COLOUR COMBINATIONS AND DETAILS**


Lederam Manta S1 / S2 / CWS1 / C150 / C180

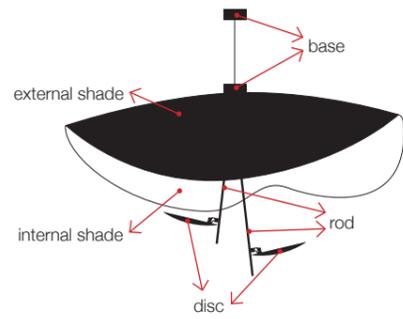

code	shade		rods	discs	base
	external	internal			
3	black	gold	black	gold	black
4	black	copper	black	copper	black
5	white	white	gold	white	white
6	white	gold	satin	white	white
8	white	white	satin	white	white
10*	white	white	white	white	white


\* Finish not available for model Lederam Manta S2

Lederam C2 / C3 / W2

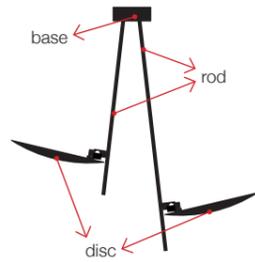

code	discs	rods	base
2	black	satin	black
3	gold	black	black
4	copper	black	black
5	white	gold	white
6	white	satin	white


Lederam W

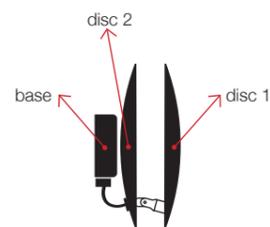

code	disc 1		disc 2		base
	external	internal	internal	external	
1	black	copper	copper	black	black
2	black	gold	gold	black	black
3	gold	gold	gold	white	white
4	copper	copper	copper	white	white
5	white	gold	gold	white	white
6	white	copper	copper	white	white



Lederam W1




code	disc		joint	base
	external	internal		
1	black	black	nickel	black
3	gold	black	nickel	black
4	copper	black	nickel	black
6	white	white	nickel	white

Lederam WF



code	disc		base
	external	external	
1	black	black	black
3	gold	white	white
4	copper	white	white
6	white	white	white

Lederam F1 / F2 / F3

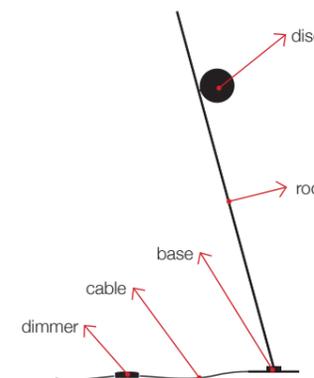


code	discs	rods	base	cable	dimmer
2	black	satin	black	black	black
3	gold	black	black	black	black
4	copper	black	black	black	black
5	white	gold	white	white	white
6	white	satin	white	white	white
12*	brass	black	black	black	black

\* Finish available for model Lederam F0 only



# CHANDELIER

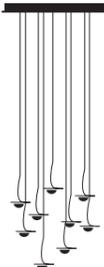GOLD MOON	JACKIE O	POSTKRISI	SWEET LIGHT
<p>Gold Moon Chandelier is supplied with single pendants with black wires, irregular black/gold shade dia. 20 cm ca. and copper curl directing the beam of light upwards to the shade. Each shade is handmade, therefore the dimensions can slightly change from pendant to pendant.</p> 	<p>Jackie O Chandelier is supplied with single pendant with blue cable and nickel curl with lens, to define the beam of light of each pendant.</p> 	<p>PostKrisi Chandelier is supplied with natural fibreglass spheres with a diameter of 14 or 20 cm. On request it is also available with spheres in different colours or lined with gold/silver/copper coloured leaf.</p> 	<p>Sweet Light Chandelier is supplied with aluminium spheres with a diameter of 10 cm. On request it is also available with brass or silver coloured spheres.</p> 

## Bases

The Chandeliers are supplied with satin steel bases in different dimensions.



square

30x30x5 cm / 60x60x5 cm / 90x90x5 cm



rectangular

150x30x5 cm / 150x60x5 cm / 90x30x5 cm




round

Ø 40 cm / Ø 78 cm

The bases of the Chandeliers are modular and very easy to install.

The satin finish steel plates are anchored to the white painted metal frame by means of suspension chains that facilitate both installation and maintenance. They are then secured in place with square head screws; the nickel cube that covers the screw remains exposed (see drawing). The steel plate is available on request white painted.

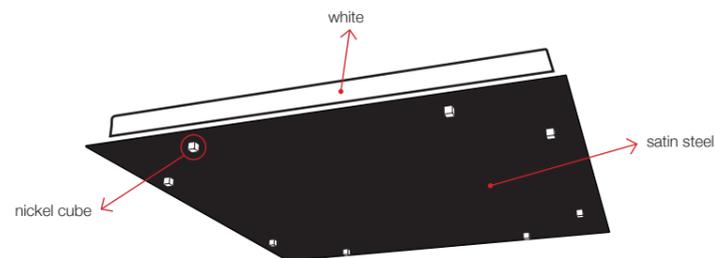


GOLD MOON	JACKIE O	POSTKRISI	SWEET LIGHT
-----------	----------	-----------	-------------

## Standard Jack Mounting (NOT ADJUSTABLE HEIGHT)

Each pendant is mounted onto the base by means of a connection jack that fits in and locks in place in a simple motion. The base can therefore be shipped separately from the pendants, facilitating both the shipping and installation itself.

### STANDARD

The standard maximum height of the codified Jackie O Chandeliers is 120 cm (obtained from H of base 5 cm + max pendant height of 115 cm). Starting from the maximum height, the cable lengths descend 7 times by about 5 cm.

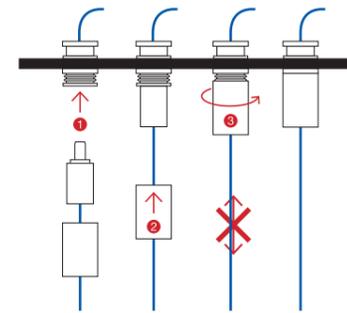


### ON REQUEST

By choosing the maximum cable length (up to max 300 cm – dimensions rounded up to the nearest 5 cm) and downsizing while retaining the proportions of the standard codes, a custom made composition can be produced. Any further customisation entails a bespoke design requiring a quotation (customized production).

NB Each capillary is manually bent. A tolerance of about 1 to 2 cm on the given cables lengths must be considered as acceptable

### STANDARD

The standard maximum heights of the codified PostKrisi and Sweet Light Chandeliers are 180/300/400 cm (obtained from H of base 5 cm + max pendant height of 175/295/395 cm).

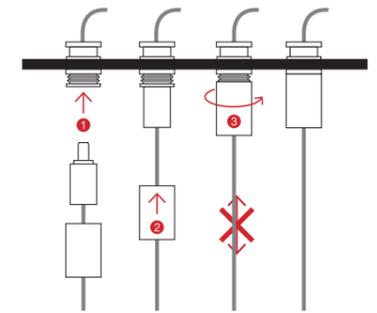

### ON REQUEST

By choosing the maximum cable length (up to max 300 cm – dimensions rounded up to the nearest 5 cm) and downsizing while retaining the proportions of the standard codes, a custom made composition can be produced. Any further customisation entails a bespoke design requiring a quotation (customized production).


## On Request (ADJUSTABLE HEIGHT)

### TENSIONER

The version with a tensioner is available in those cases where the length of the cable requires adjustment during installation.

The tensioner is supplied disassembled.


Once you have placed the cable at the desired height, it must be cut and reconnected to the inside of the base (this operation helps preventing voltage drops and tangled cables inside the base).



### CABLE LOCKING

The version with cable locking is available in those cases where the length of the cable requires adjustment during installation or in case of custom chandelier with bigger PostKrisi spheres (dia. 40 or 60 cm).

The cable locking is supplied disassembled. Once you have placed the cable at the desired height, it must be cut and reconnected to the inside of the base (this operation helps preventing voltage drops and tangled cables inside the base).

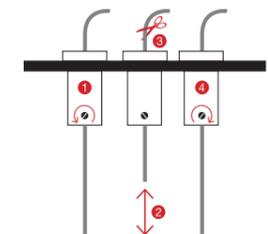

## Custom

On request we can supply customized designs with different base dimensions, a different number of pendants or with a tensioner instead of a jack connection. The PostKrisi and Sweet Light pendants are interchangeable on the bases, therefore we can also supply mixed Chandeliers.






### MACCHINA DELLA LUCE LED BOARDS

12W

18W

24W

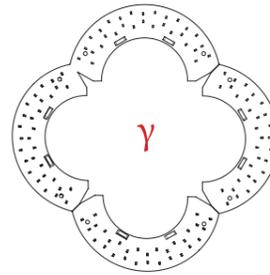

2 x  
LED board 6W 24V DC

3 x  
LED board 6W 24V DC

4 x  
LED board 6W 24V DC


<b>Mod. A</b>		<b>Mod. E</b>	
18W β	Ø 80 cm	12W α	Ø 50 cm
12W α	Ø 30 cm	12W α	Ø 30 cm
12W α	Ø 18 cm		Ø 18 cm
42W	4410 lumen	24W	2520 lumen
<b>Mod. B</b>		<b>Mod. F**</b>	
12W α	Ø 80 cm	24W γ	Ø 120 cm
	Ø 18 cm	18W β	Ø 80 cm
		12W α	Ø 50 cm
12W	1260 lumen		Ø 30 cm
54W	5670 lumen		
<b>Mod. C</b>		<b>Mod. I</b>	
24W γ	Ø 120 cm	18W β	Ø 80 cm
18W β	Ø 80 cm	12W α	Ø 50 cm
	Ø 50 cm		Ø 30 cm
42W	4410 lumen	30W	3150 lumen
<b>Mod. D*</b>			
18W β	Ø 120 cm		
18W β	Ø 80 cm		
12W α	Ø 50 cm		
12W α	Ø 30 cm		
12W α	Ø 18 cm		
60W	6300 lumen		

\* 110V version available with 4x α 12W / tot. 48W max

\*\* 110V version available with 2x β 18W / 1x α 12W / tot. 48W max



### STCHU-MOON LED BOARDS


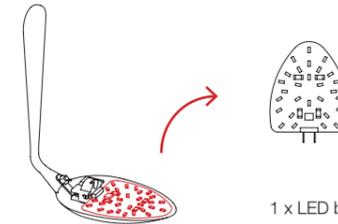


1 x LED board GY6.35 4W 24V DC

1x 4W / 420 lumen			Stchu-Moon 05
			Stchu-Moon 01 Ø 40 cm
			Stchu-Moon 01 Ø 60 cm
2x 4W / 840 lumen			Stchu-Moon 09
			Stchu-Moon 02 Ø 40/60 cm
4x 4W / 1680 lumen			Stchu-Moon 02 Ø 80/100 cm
6x 4W / 2520 lumen	3x		Stchu-Moon 02 Chandelier







### OUTDOOR: GEL BOX SYSTEM

	<b>MB1</b> Mini gel box IP68
	5,3x3,9x2,4 cm
	(max 2 connections - connectors included)
	<b>MB2</b> Mini gel box IP68
	5,2x5,3x2,9 cm
	(max 6 connections - connectors included)
	<b>KP1</b> Extension cord kit
	5 mt
	with mini gel box IP68 for single connection
	(max 1 lamp)
	<b>ED6</b> Driver 10W 12V DC 220-240V IP67
	7x3,7x2,3 cm / cables 45 cm ca.
	not dimmable
	(max 9 lamps)
	<b>ED7</b> Driver 30W 12V DC 220-240V IP67
	11x3,7x2,3 cm / cable 12V 45 cm ca. / plug cable 200 cm
	not dimmable
	(max 30 lamps)
	<b>ED7D</b> Driver 30W 12V DC 220-240V IP67
	8x8x3 cm / cables 12V 45 cm ca. / plug cable 200 cm
	Triac dimmable
	(min. 12 max 30 lamps)



### OUTDOOR: QUICK CONNECTORS SYSTEM

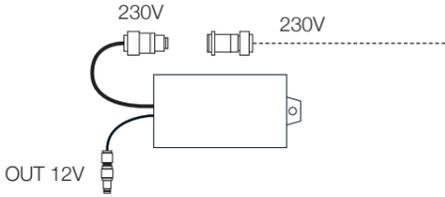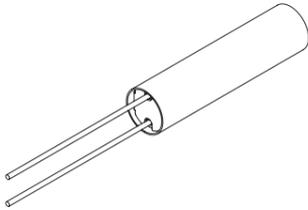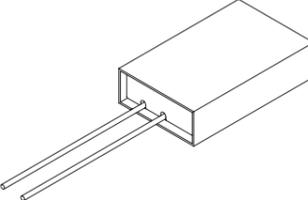	<b>ED6CR</b> Driver 10W 12V DC 220-240V IP67
	230V and 12V connectors included
	3,7x2,3x7 cm - cables 45 cm ca.
	not dimmable
	<b>CRM</b> Quick IP68 multiple connector / 1 IN & 5 OUT 12V
	(max 5 connections)
	<b>CRS</b> Quick IP68 IN single connector
	(max 1 connections)
	<b>KP2</b> Extension cord kit with quick IP68 connectors CRS
	5 mt
	(max 1 lamp)
	<b>FKIPL</b> Kit box driver
	Ø 5x20 cm / cable 12V 45 cm / plug cable 200 cm
	not dimmable (driver ED7)
	standard
	<b>FKIPLD</b> Kit box driver
	16x10x4 cm / cable 12V 45 cm / plug cable 200 cm
	Triac dimmable (driver ED7D)
	available on request



## OUTDOOR ACCESSORIES

	<b>MSMP</b> Supporting modular plate
	for More (MR70/MR100/MR130)
	32x32x32 cm
	(max 3 lamps)
	<b>MPT</b> Peg
	for More (MR70/MR100/MR130)
	25 cm
	<b>MSM</b> Supporting plate
	for Medousê F
	31x31 cm ca.
	<b>MDCV</b> Plug cable 230V standard EU (CH available on request)
	for Medousê F
	350 cm




## MEDOUSÊ INSTALLATION SUGGESTIONS

### WARNING

For stability reasons the lamp must be fastened to a solid surface such as a well or basement; in alternative it can be mounted on the modular supporting plate (ref. L / code MSM) available on request. Before installing the lamp, please check the levelling of the soil and make sure that it can support the weight of the fitting.



(Medousê weight Ø 30 cm 15 kg / Ø 50 cm 31 kg)

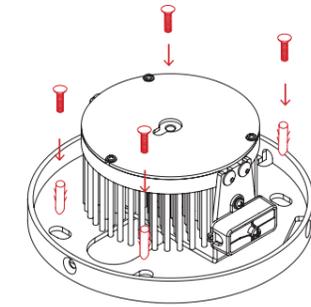

lamp base with holes for the fastening  
(plugs not included)



### Example 1

with basement and supply cable from the side

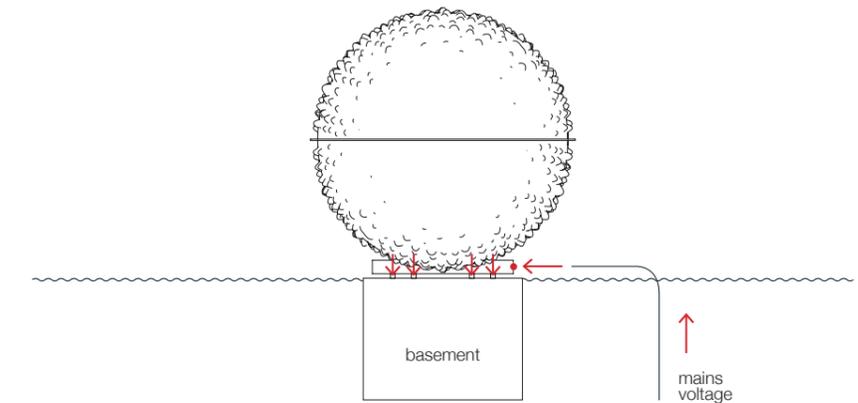



### Example 2

with well and supply cable from underneath

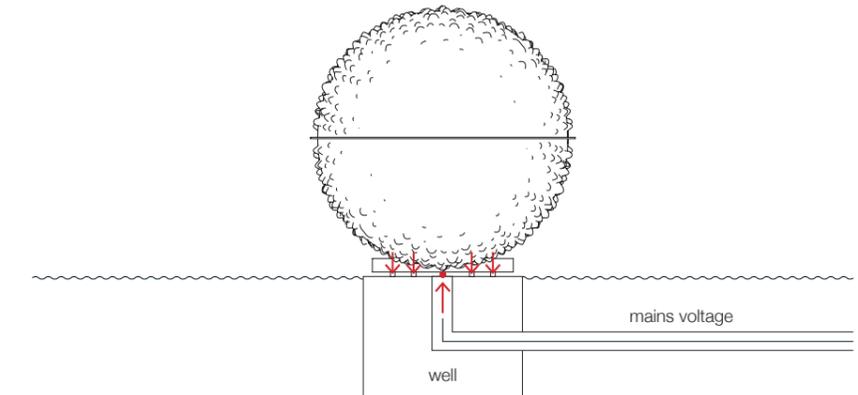


### Example 3

with supporting plate 1x code MSM  
with plug cable 230V 1x code MDCV

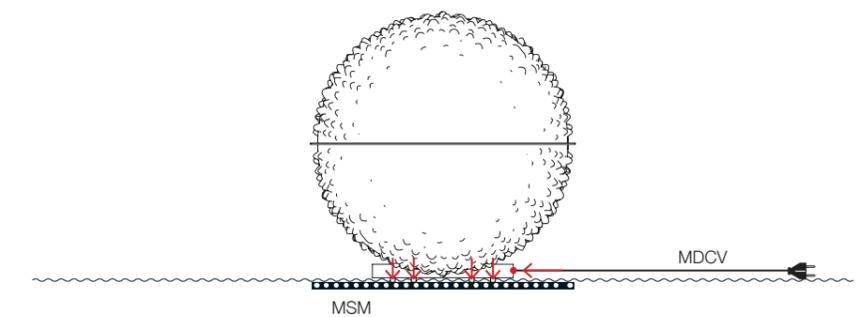


**Installation suggestions for Outdoor / GEL BOX system**


1	Connection type	For models	Power supply	Access. applied
	GEL BOX system (without well)	Syphasera/Syphasera/Syphaduepassi/More	code ED6	1x code ED6 1x code MB1 1x code MB2

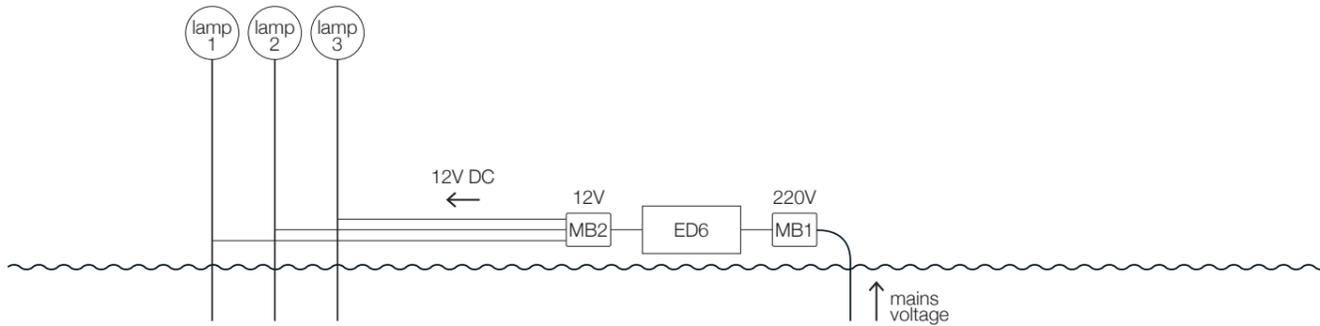

2	Connection type	For models	Power supply	Access. applied
	GEL BOX system (with well)	Syphasera/Syphasera/Syphaduepassi/More	provided by client	1x code MB2 1x code KP1

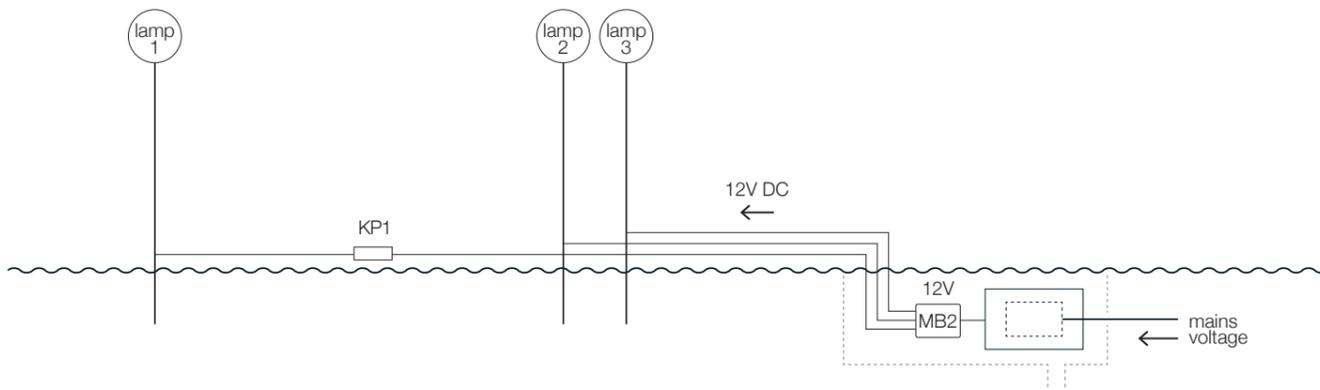


3	Connection type	For models	Power supply	Access. applied
	GEL BOX system (without well)	More (MR70/MR100/MR130)	code ED6	1x code ED6 1x code MB1 1x code MB2 1x code MSMP 3x code MPT*

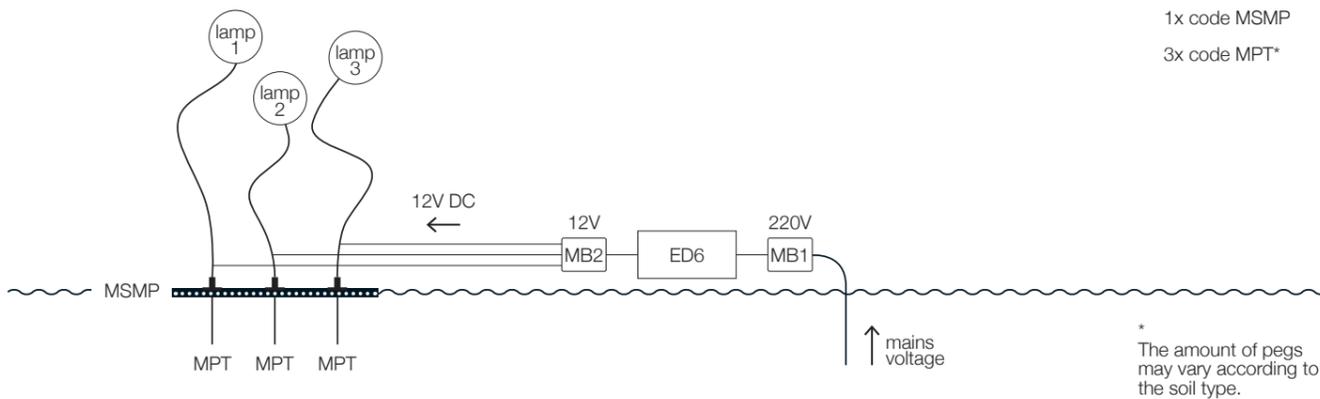


**Installation suggestions for Outdoor / GEL BOX system and QUICK CONNECTORS system**


4	Connection type	For models	Power supply	Access. applied
	GEL BOX system (with well)	More (MR70/MR100/MR130)	provided by client	1x code MB2 1x code MSPT 3x code MPT

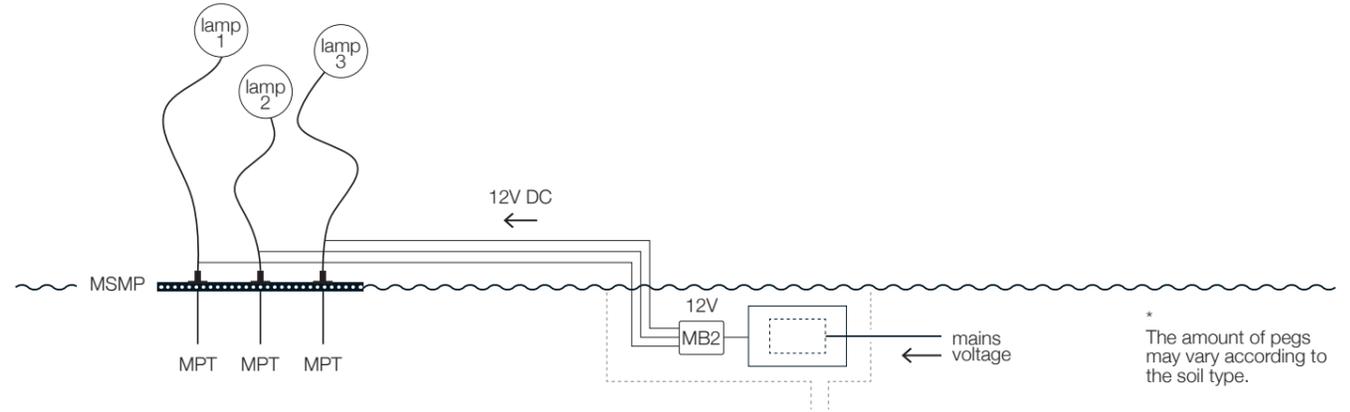

5	Connection type	For models	Power supply	Access. applied
	QUICK CONNECTORS system	Syphasera/Syphasera/Syphaduepassi/More	code ED6CR	1x code ED6CR 1x code CRM 5x code CRS 1x code KP2

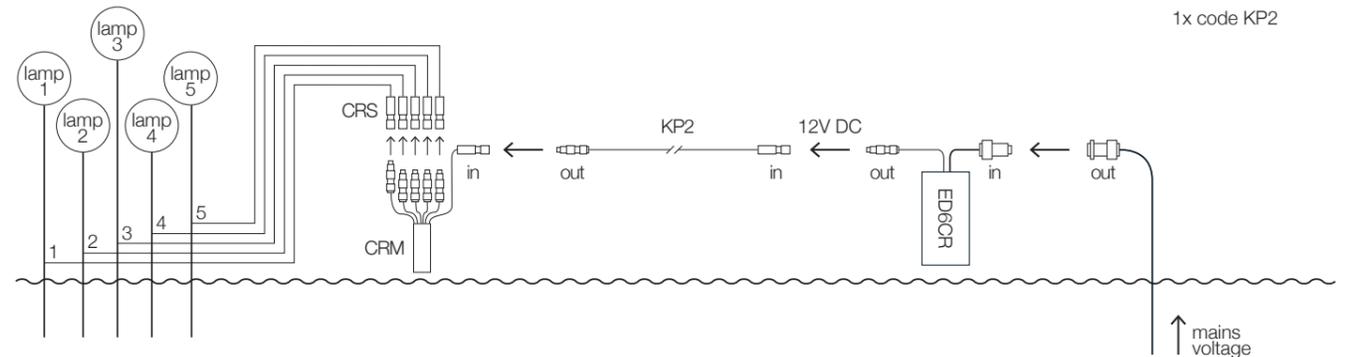


6	Connection type	For models	Power supply	Access. applied
	QUICK CONNECTORS system	Syphasera/Syphasera/Syphaduepassi/More	code ED6CR	2x code CRM 9x code CRS *driver provided by client

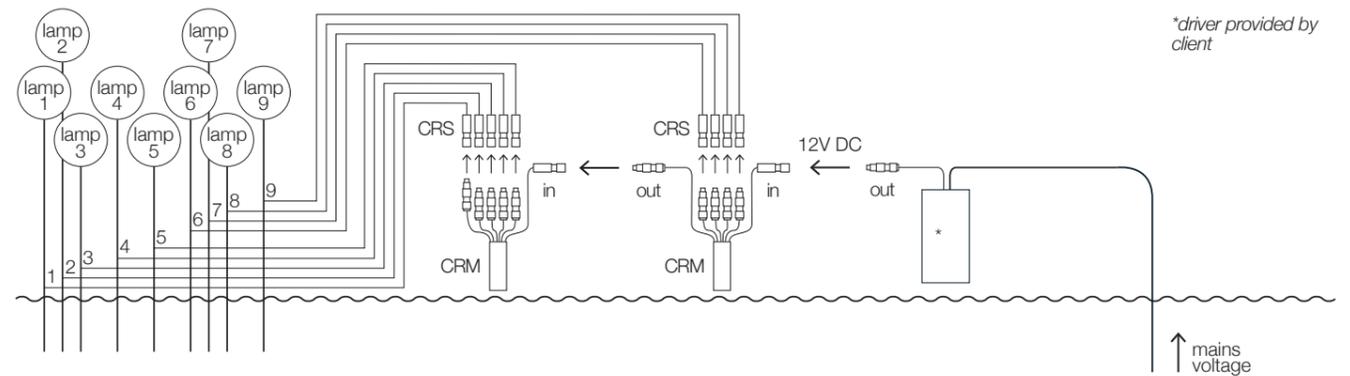



## PSU (POWER SUPPLY UNIT) KITS FOR JACKIE O IC-JC / GOLD MOON IC-JC

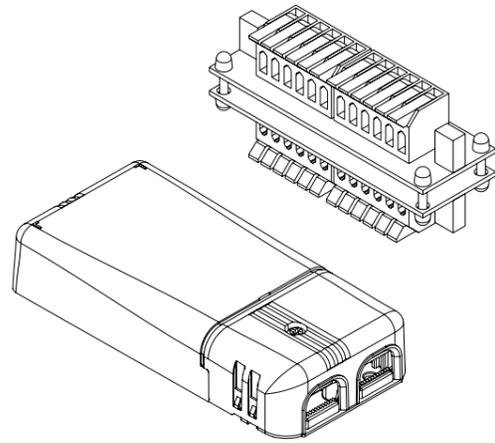

By means of the PSU kit, multiple LED lamps can be controlled simultaneously through a multiple connection board (9x3x5 cm) connected to a driver. In the event of a failure of even a single LED, the board allows the other LED to continue working properly. It is advisable to install the kit in a technical compartment accessible for inspection at a maximum distance of about 5 meters from the point of installation of the jacks or tensioners, in order to avoid voltage drops. The technical compartment must be located in an easily accessible place and large enough to accommodate both the wired multiple connection board and the power supply.

### PSU KITS

#### K9WS12 20W driver kit 220-240V (with ED9)

min 5 max 12x1W lamps

Triac dimmable

driver dimensions 11x5,2x2,2 cm

#### K10WS12 20W driver kit 110-240V (with ED10)

min 2 max 12x1W lamps

1...10V or PUSH dimmable

driver dimensions 11x5,2x2,2 cm

#### K11WS12 20W driver kit 110-240V (with ED11)

min 2 max 12x1W

DALI dimmable

driver dimensions 11x5,2x2,2 cm

#### K12WS24 30W driver kit 220-240V (with ED12)

min 13 max 24x1W

Triac dimmable

driver dimensions 18x6x3,5 cm

#### K13WS24 36W driver kit 110-240V (with ED13)


min 2 max 24x1W

DALI or PUSH dimmable

driver dimensions 16,5x4,1x3,5 cm



## DRIVERS @24V DC FOR PEPITA 65 / PEPITA 102 / JACKIE O / GOLD MOON

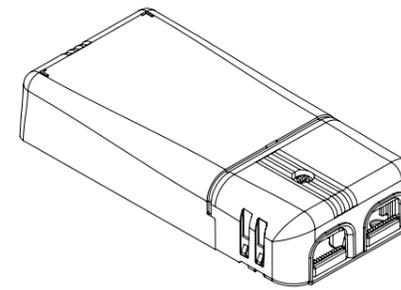

By means of the driver, multiple LED lamps can be controlled simultaneously. In the event of a failure of even a single lamp, the other lamps continue working properly. It is advisable to install the driver in a technical compartment accessible for inspection at a maximum distance of about 5 meters from the point of installation of the lamps, in order to avoid voltage drops. The technical compartment must be located in an easily accessible place and large enough to accommodate the power supply.

### DRIVERS @24V dc

#### ED9 rated voltage 220-240V

rated output 20W (min 3 max 16x1W lamps)

Triac dimmable

dimensions 11x5,2x2,2 cm

#### ED11 rated voltage 110-240V

rated output 15W @110V / 16W 240V@ (min 1 max 12x1W lamps)

DALI dimmable

dimensions 11x5,2x2,2 cm

#### ED14 rated voltage 110-240V

rated output 4W (min 1 max 3 lamps)


not dimmable

dimensions 4x2,7x2,1 cm




**INSTRUCTIONS FOR THE CONNECTION OF MULTIPLE LAMPS RECESSED FOR PLASTERBOARD**  
**WALL/CEILING PEPITA 65 / PEPITA 102 / AMETISTA**

1.

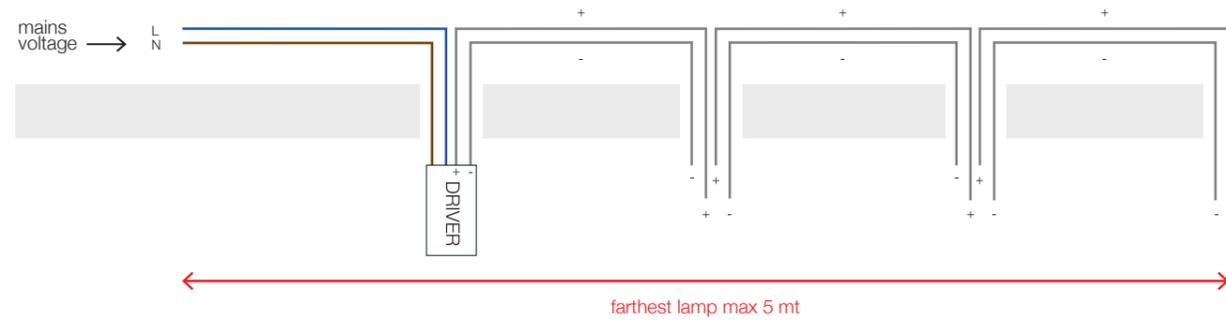


it is recommended to respect the polarity

2.

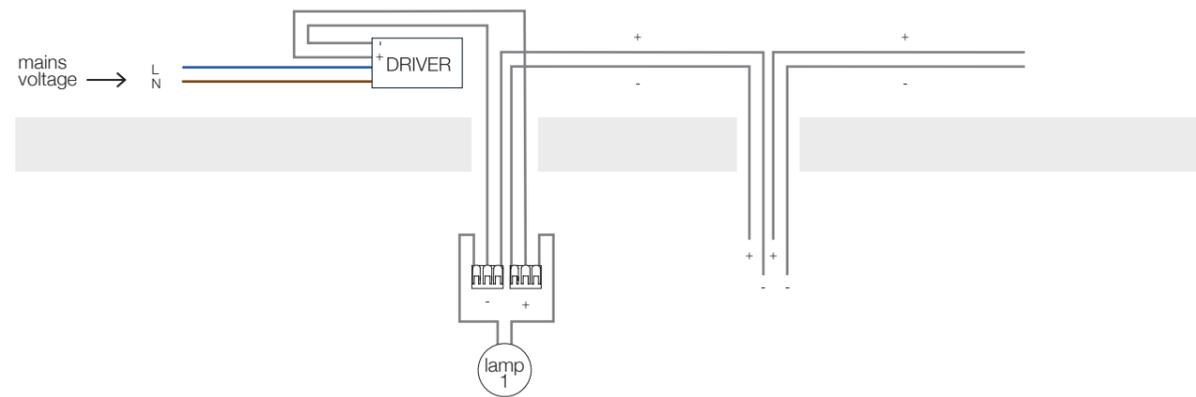

3.

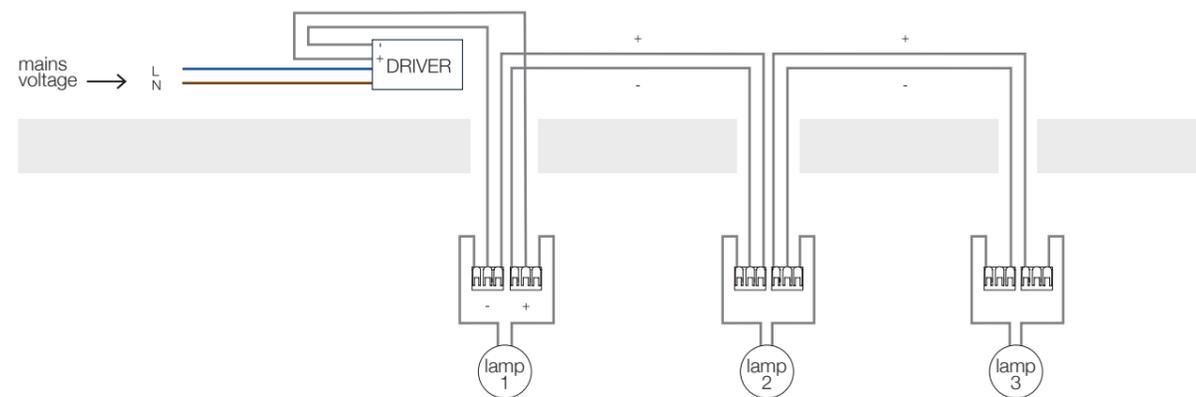

the cable between the lamps is not supplied,  
it is recommended to use one with a minimum section of conductors of 1 mmq




**DIMMING WIRING DIAGRAMS**

**Diagram 1 - IGBT - TRIAC**

1 wire for power supply  
1 wire for dimming


WARNING: Our LEDs can be dimmed by using compatible dimmers tested specifically to dim very low loads. We suggest checking the minimum load of the dimmer before installation.

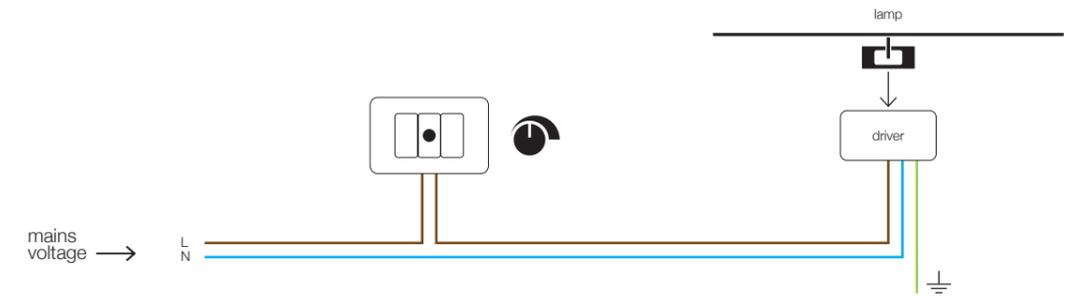

**Diagram 2 - PUSH**

2 wires for power supply  
2 wires for dimming


WARNING: you need two extra wires, marked in red, in order to dim.

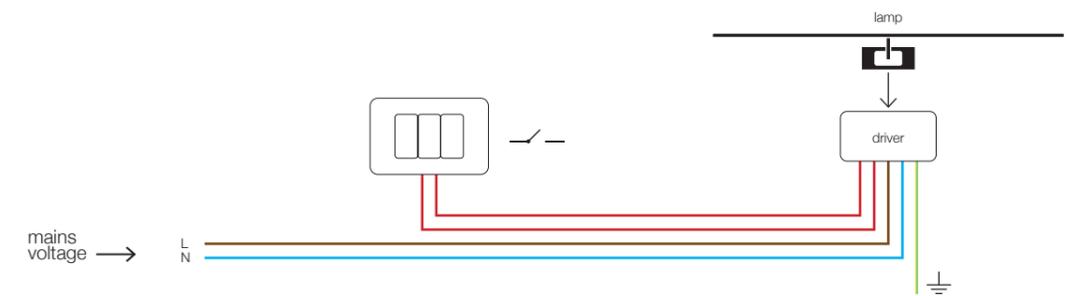

**Diagram 3 - 1...10V - DALI**

2 wires for power supply  
2 wires for dimming

WARNING: you need two extra wires, marked in red, in order to dim.

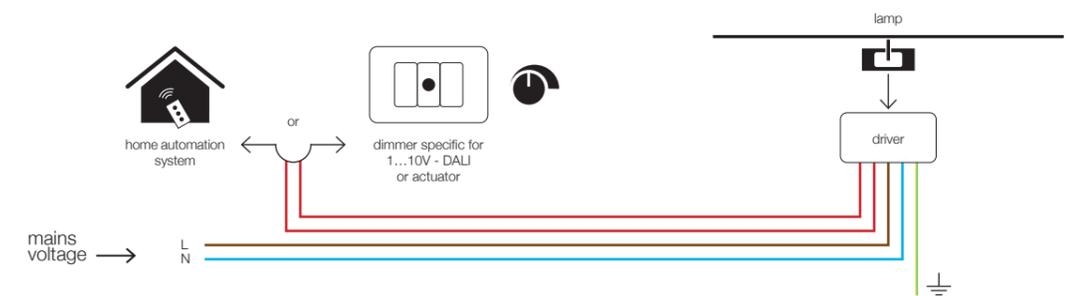

## **Catellani & Smith**

### Offices

via Cimitero 1/A  
I-24020 Villa di Serio, BG  
T. +39 035 656088  
[info@catellanismith.com](mailto:info@catellanismith.com)

### Showrooms

Bergamo  
Via Borfuro, 1 Bergamo  
T. +39 035 210193  
[show-room@catellanismith.com](mailto:show-room@catellanismith.com)

Milano  
Salvioni Milano Durini  
Via Durini, 3 Milano

London  
Ltd. 7-15 Rosebery Ave Clerkenwell  
London EC1R 4SP, U.K.

[www.catellanismith.com](http://www.catellanismith.com)



Catellani & Smith®